



MUGGI



Fase<sup>1</sup>

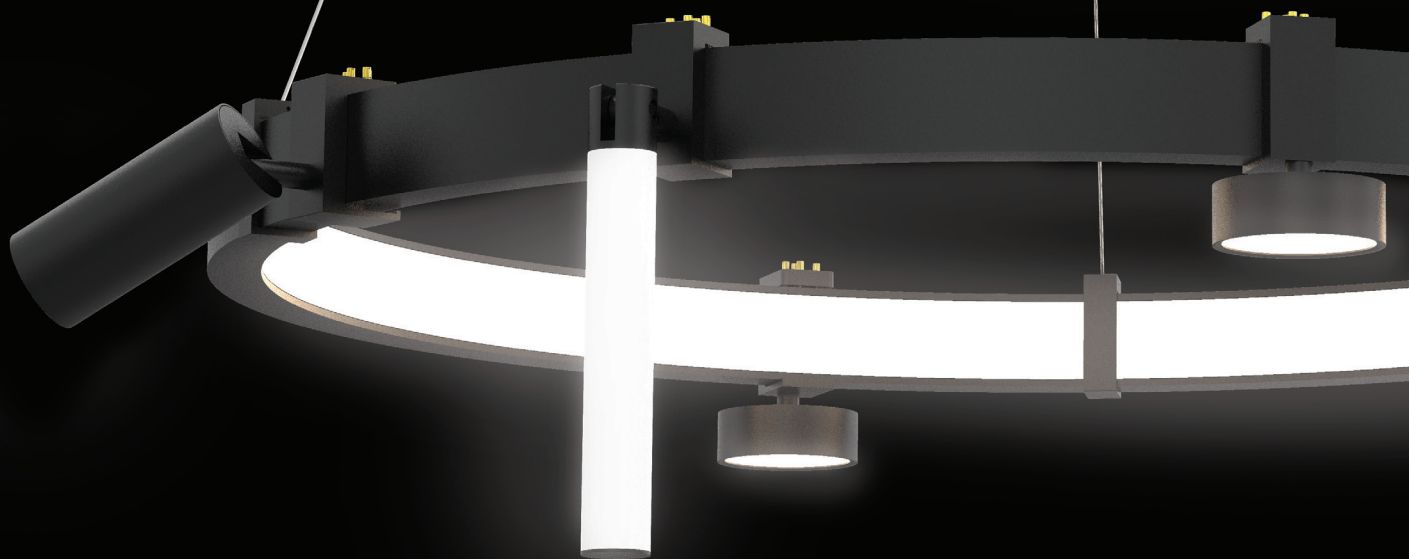

# CONSTRUCT MAST MUCCI ROUTE

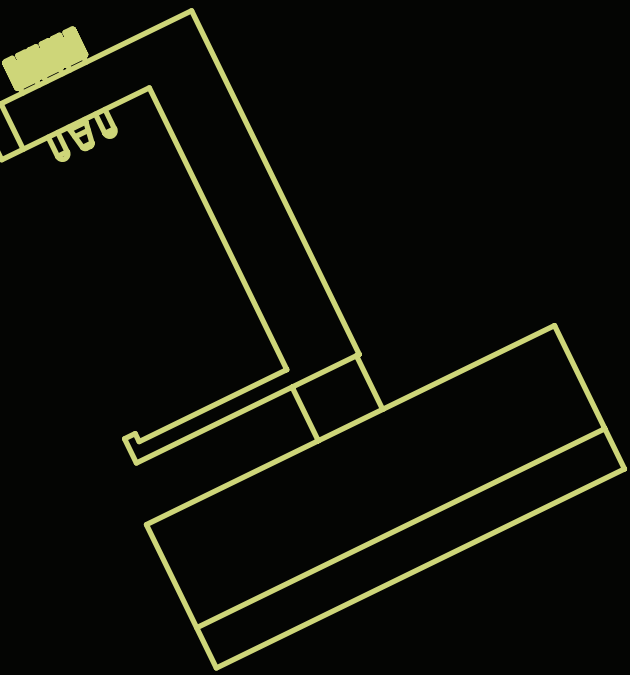

The Mucci System is UL Listed to ensure safe operation for many years to come. We want to ensure your success with every project you tackle. We're also offering a 5 year limited warranty.





## Introducing **MUCCI**

A new custom system for lighting, the minimalist Mucci collection features a black aluminum body, that's now also available in white! Options include round and rectangular options to bring a sleek, contemporary design to multiple environments. Integrated LED lighting is built into the fixture frame to create one unified piece, with the option for an inner or outer glow in the circular chandeliers. Mucci is fully customizable with multiple light modules that can be easily attached to a copper power rail above the aluminum frame for tailored directional lighting.








## YOU IN OR OUT?

Inward or outward bands of LED for a subtle or robust glow of illumination.



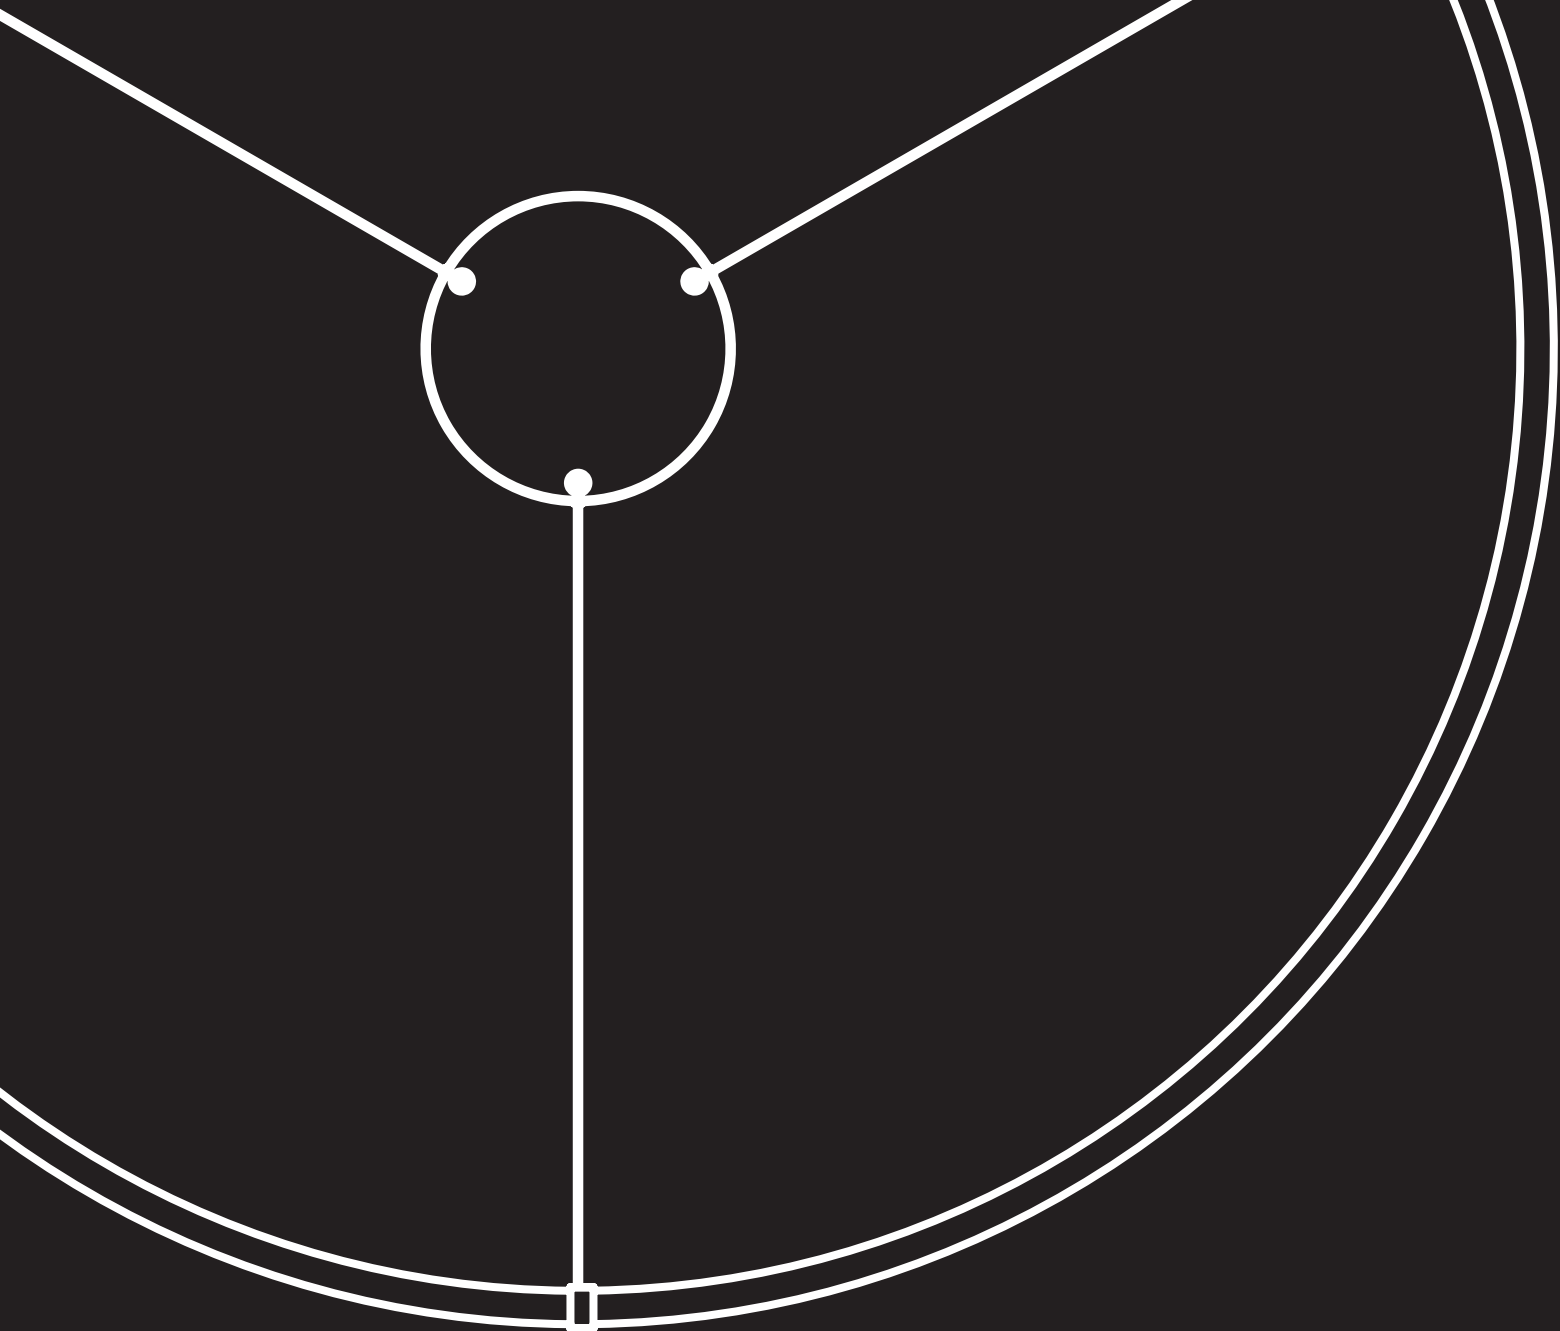

## INWARD LED

This inward LED band offers bright illumination that is directed within itself, casting a subtle glow above. The modern, matte black or white trim adds a minimalistic decorative element for multiple room settings. With three different sizes available, this LED ring can be housed in a small foyer or in a large conference room.







INWARD LED

38136-016  
[ LED ]



38134-012  
[ LED ]



38135-019  
[ LED ]

# ROUND INWARD LED

## HOUSING

18 gauge powder coated steel housing  
Remodel housing complete with adjustable mounting clips suitable for 1/2" and 5/8" drywall  
New construction plate, insulated ceiling box and airtight IC box sold separately (refer to housing options)

## MODULES

Any combination up to 70W max:  
8W SPOT LIGHT | 13W SPOT LIGHT | 10W DOWNLIGHT |  
6W GLOW BAR | 10W GLOW BAR

## ELECTRICAL

Class 2 dimmable constant current driver (included)  
Driver box mates to fixture by 12" flexible BX cable  
Thermally protected  
Input voltage: 120V. For 277V and 347V input options consult Eurofase.

## PHOTOMETRICS

See pg 32 for complete photometrics

## CUSTOMIZATION

For customization, please consult Eurofase


### 38136-016 LED 60" INWARD LED PENDANT

## LAMPING

88W INTEGRATED LED  
Kelvin: 3000K  
Delivered Lumens: 3690LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

## DIMENSIONS

60"DIA x 2"H  
Canopy: 11"DIA  
Max Height: 99.5"

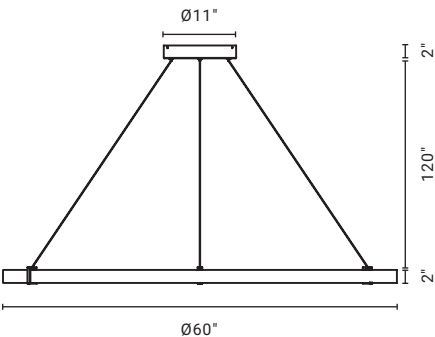


### 38135-019 LED 48" INWARD LED PENDANT

## LAMPING

73W INTEGRATED LED  
Kelvin: 3000K  
Delivered Lumens: 3280LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

## DIMENSIONS

48"DIA x 2"H  
Canopy: 9.5"DIA  
Max Height: 99.5"

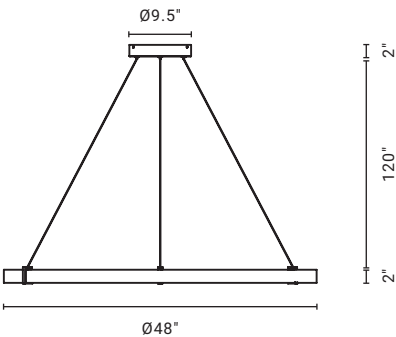


### 38134-012 LED 32" INWARD LED PENDANT

## LAMPING

54W INTEGRATED LED  
Kelvin: 3000K  
Delivered Lumens: 2430LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

## DIMENSIONS

32"DIA x 2"H  
Canopy: 9.5"DIA  
Max Height: 99.5"

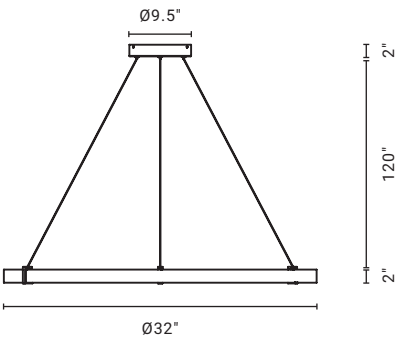



SHOWN WITH



38141-010

# RECTANGULAR INWARD LED

## HOUSING

18 gauge powder coated steel housing  
Remodel housing complete with adjustable mounting clips suitable for 1/2" and 5/8" drywall  
New construction plate, insulated ceiling box and airtight IC box sold separately (refer to housing options)

## MODULES

Any combination up to 70W max:  
8W SPOT LIGHT | 13W SPOT LIGHT | 10W DOWNLIGHT |  
6W GLOW BAR | 10W GLOW BAR

## ELECTRICAL

Class 2 dimmable constant current driver (included)  
Driver box mates to fixture by 12" flexible BX cable  
Thermally protected  
Input voltage: 120V. For 277V and 347V input options consult Eurofase.

## PHOTOMETRICS

See pg 32 for complete photometrics

## CUSTOMIZATION

For customization, please consult Eurofase




## 38138-010 **LED** 60" INWARD RECTANGULAR LED PENDANT

## LAMPING

76W INTEGRATED LED  
Kelvin: 3000K  
Delivered Lumens: 3600LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

## DIMENSIONS

59.5"L 18.75"W x 2"H  
Canopy: 11.75"L x 4.75"W  
Max Height: 99.5"

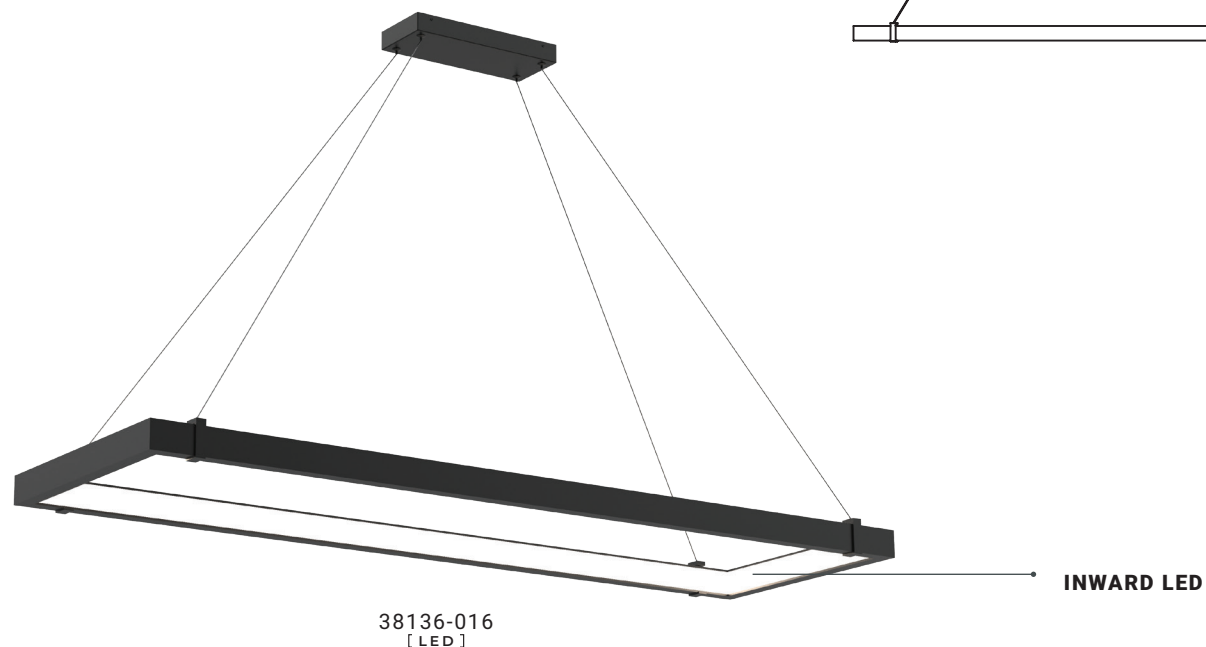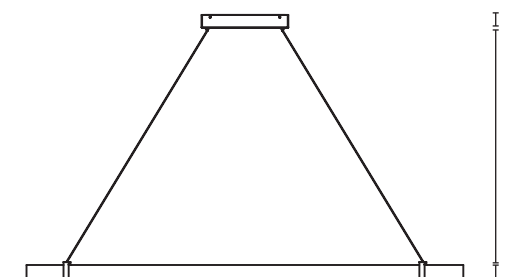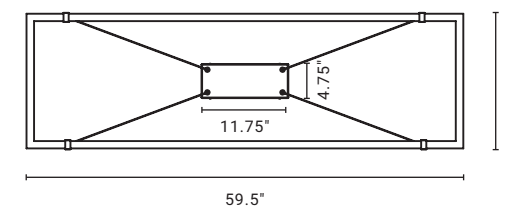

38136-016  
[LED]



# OUTWARD LED

This outward LED band showcases a luminous halo, accented by matte black trim. The outward direction of the LED lights create a distinct glow that is popular amongst modern commercial settings.





OUTWARD LED



38133-015  
[ LED ]



38131-011  
[ LED ]



38132-018  
[ LED ]

# ROUND OUTWARD LED

## HOUSING

18 gauge powder coated steel housing  
Remodel housing complete with adjustable mounting clips suitable for 1/2" and 5/8" drywall  
New construction plate, insulated ceiling box and airtight IC box sold separately (refer to housing options)

## MODULES

Any combination up to 70W max:  
8W SPOT LIGHT | 13W SPOT LIGHT | 10W DOWNLIGHT |  
6W GLOW BAR | 10W GLOW BAR

## ELECTRICAL

Class 2 dimmable constant current driver (included)  
Driver box mates to fixture by 12" flexible BX cable  
Thermally protected  
Input voltage: 120V. For 277V and 347V input options consult Eurofase.

## PHOTOMETRICS

See pg 32 for complete photometrics

## CUSTOMIZATION

For customization, please consult Eurofase


### 38133-015 LED 60" OUTWARD LED PENDANT

## LAMPING

84W INTEGRATED LED  
Kelvin: 3000K  
Delivered Lumens: 3780LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

## DIMENSIONS

60"DIA x 2"H  
Canopy: 11"DIA  
Max Height: 120"

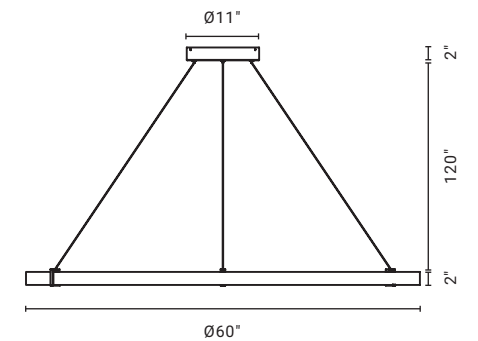


### 38132-018 LED 48" OUTWARD LED PENDANT

## LAMPING

70W INTEGRATED LED  
Kelvin: 3000K  
Delivered Lumens: 3150LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

## DIMENSIONS

48"DIA x 2"H  
Canopy: 9.5"DIA  
Max Height: 120"

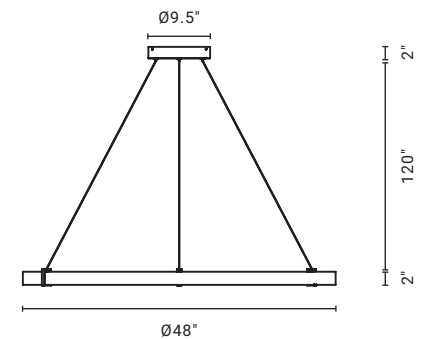


### 38131-011 LED 32" INWARD LED PENDANT

## LAMPING

52W INTEGRATED LED  
Kelvin: 3000K  
Delivered Lumens: 2340LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

## DIMENSIONS

32"DIA x 2"H  
Canopy: 9.5"DIA  
Max Height: 120"



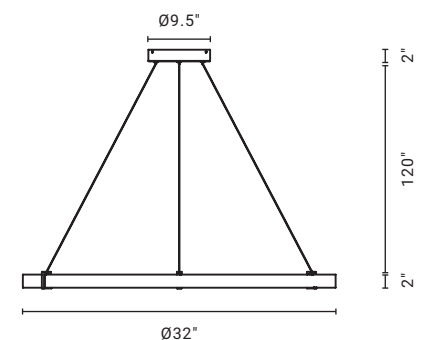





# BASE BEGINNINGS

Custom lighting made just the way you want it. This low-voltage system creates a safe environment that reduces the risk of shock despite its exposed copper rail. After selecting your pendant, add your accessories based on functionality and style. A special hook design allows for easy attachment to hang modules on the inside or the outside of the ring. Add as many modules as you would like, up until 70 watts max.


## 1 First choose your base

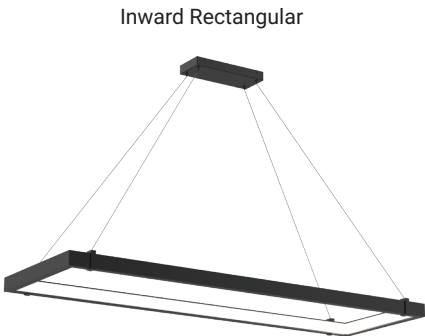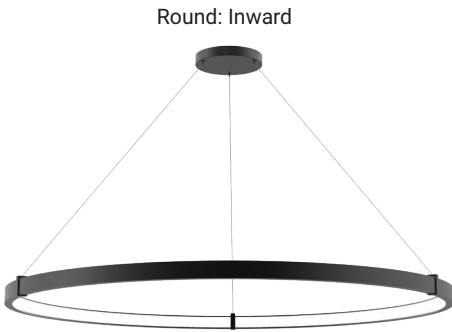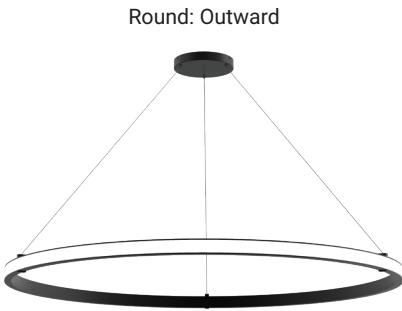

### BASE FEATURES

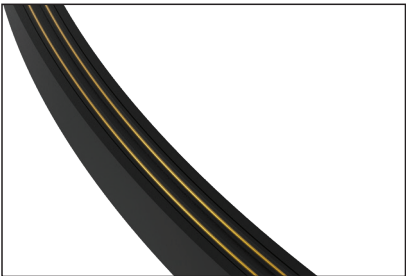

FLUID COPPER RAIL FOR CUSTOM ARRANGEMENT

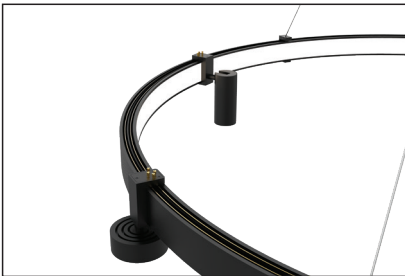

CLAMPS 2 WAYS

### OPTIONAL ATTACHMENTS



## 2 Choose any combination of modules to attach (UP TO 70 WATTS MAX)

8W Adjustable Spot Light



13W Adjustable Spot Light



10W Fixed Down Light



6W Glow Bar



10W Glow Bar



### MODULE FEATURES




SLIDE AND LOCK





## MODERN MODULES


The Mucci collection features 5 modules to choose from: 2 adjustable spot lights, 1 fixed downlight, and 2 glow bars. Depending on your needs, you can mix and match, creating your own design, to a combined maximum of 70W.

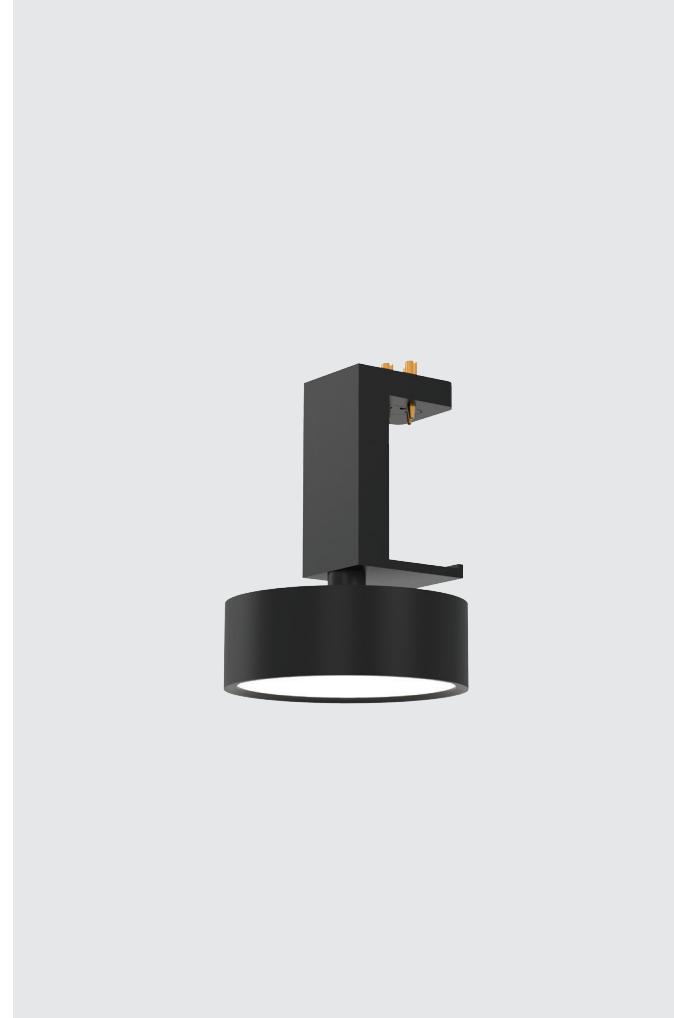



# MUCCI PLUS+

01

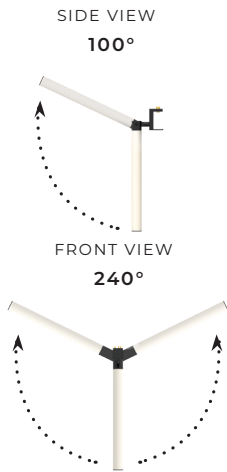


38205-019  
10W GLOW BAR

**LAMPING**  
10W Integrated LED  
Kelvin: 3000K  
Delivered Lumens: 730LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

**ADJUSTABLE HEAD**  
Cylindrical body for full 360° illumination  
Diffused Light  
Rotate: 100°, 240°

**DIMENSIONS**  
1.25"DIA x 13"H

02

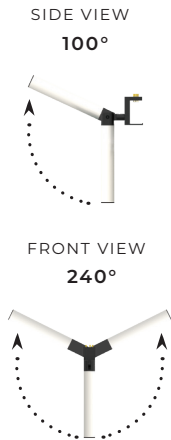

38204-012  
6W GLOW BAR

**LAMPING**  
6W Integrated LED  
Kelvin: 3000K  
Delivered Lumens: 370LM  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

**ADJUSTABLE HEAD**  
Cylindrical body for full 360° illumination  
Diffused Light  
Rotate: 100°, 240°

**DIMENSIONS**  
1.25"DIA x 8"H

03




38140-013  
8W ADJUSTABLE SPOT LIGHT

**LAMPING**  
8W Integrated LED  
Kelvin: 3000K  
Delivered Lumens: 650LM  
Beam Angle: 50°  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

**ADJUSTABLE HEAD**  
Suit different application requirement  
Rotate: 110°, 240°

**DIMENSIONS**  
2"DIA x 4.5"H

04

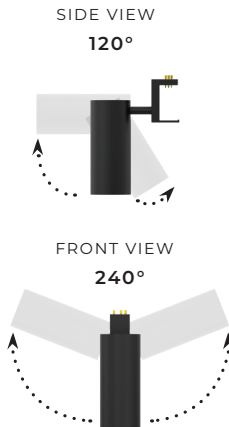

38141-010  
13W ADJUSTABLE SPOT LIGHT

**LAMPING**  
13W Integrated LED  
Kelvin: 3000K  
Delivered Lumens: 900LM  
Beam Angle: 40°  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

**ADJUSTABLE HEAD**  
Suit different application requirement  
Rotate: 120°, 240°

**DIMENSIONS**  
2.5"DIA x 5.5"H

05



38142-017  
10W FIXED DOWN LIGHT

**LAMPING**  
10W Integrated LED  
Kelvin: 3000K  
Delivered Lumens: 480LM  
Beam Angle: 160°  
CRI: 90+  
Hours: 50,000 HRS  
Dimmable: YES

**FIXED HEAD**  
Diffused Lens


**DIMENSIONS**  
3"DIA x 1"H




# PHOTOMETRICS

## SPOT

38140

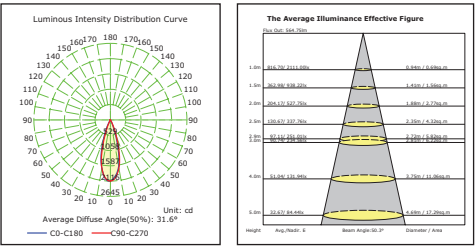


38141

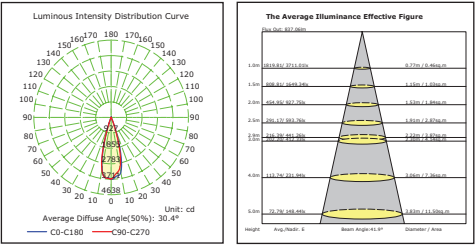


## 10W FIXED DOWN LIGHT

38142

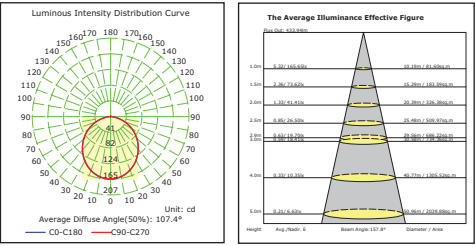


## GLOW BAR

38204

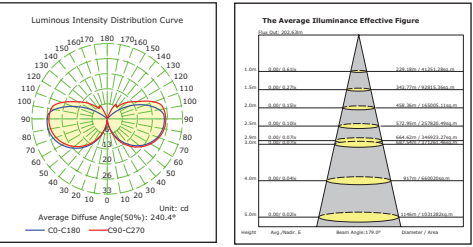

38205

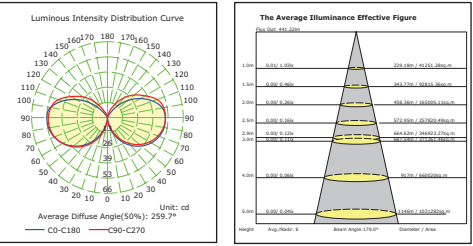

Let's customize

Our Eurofase Lighting Specialist will work with you to customize a lighting system of your choice; from choosing the amount of modules, custom shapes and lengths.

TEL: 905.695.2055  
TOLL FREE: 1.800.660.5391  
EMAIL: [orders@fase1lighting.com](mailto:orders@fase1lighting.com)



# Fase<sup>1</sup>

33 West Beaver Creek Road,  
Richmond Hill, Ontario Canada L4B 1L8

**DALLAS TRADE MART**  
Eurofase Showroom, Suite #4002

**tel** 905.695.2055  
**fax** 905.695.2056

**toll free** 1.800.660.5391  
**toll free** 1.800.660.5390



Printed in Canada  
© 2021 Eurofase Inc. All rights reserved.

Eurofase Inc. reserves the right to make alterations to the construction and design of products shown in this catalog in order to meet the laws or regulations of any authorized governing organization. The use of products shown in this catalog must comply with local building codes.