

## ARCHITECTURAL PROFILES

### FEATURES

The F38 series is our narrowest Architectural Profile sports an aluminum body at 38mm wide. Ideal for commercial & residential spaces.

## F38

MODEL	F38
DIMENSION	38mm
MOUNTING	Suspension Mount/Wall Mount/Recessed Mount
KELVINS	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	6" – 8' / Continuous Run*
LENS	Opal/Opal Dropped
LIGHT DIRECTIONS	Direct & Indirect
LUMEN PACKAGES	<b>Standard</b> 135LM/W@3500K / <b>High</b> 150LM/W@3500K*
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

### CERTIFICATIONS




### APPLICATIONS


#### SUSPENSION MOUNT



#### RECESSED MOUNT

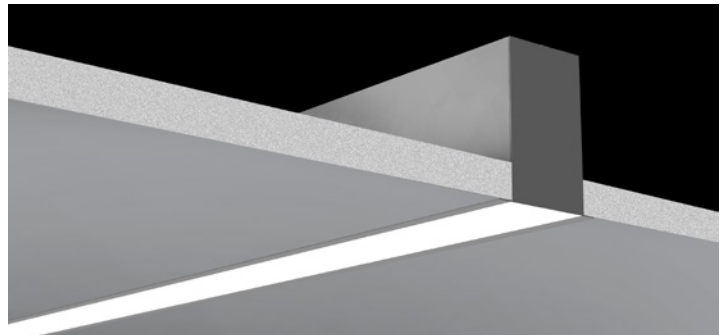


#### WALL MOUNT

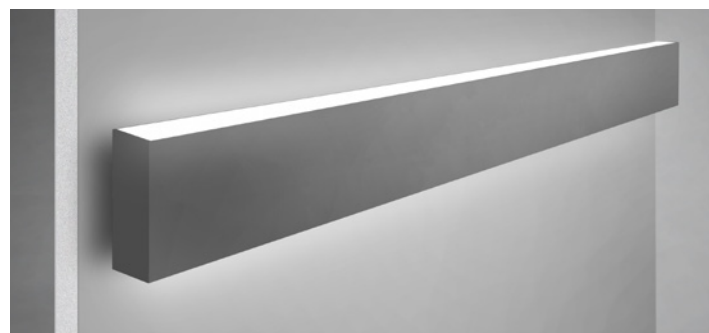


ARCHITECTURAL PROFILE - F38

F38 WALL MOUNT

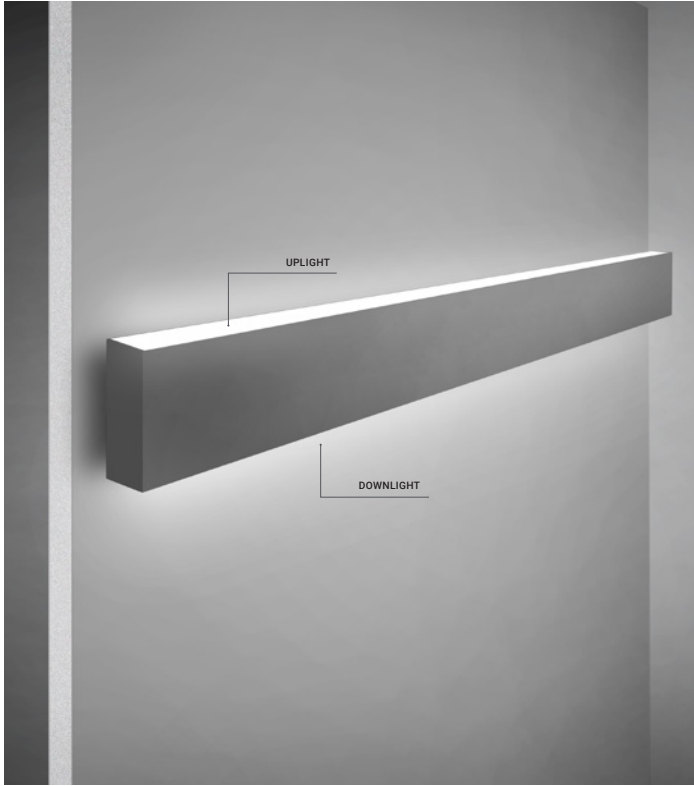


MODEL F38	36112-012
DIMENSION	38mm x 115mm
MOUNTING	Wall Mount
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	6" – 8'/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	<b>Standard</b> 135LM/W@3500K / <b>High</b> 150LM/W@3500K*
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

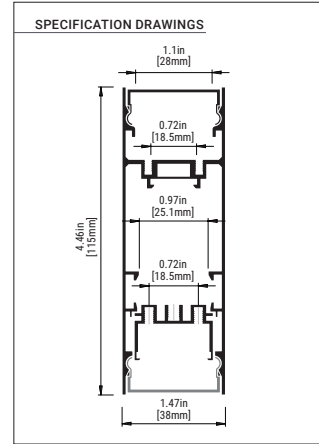

F38 SUSPENSION



MODEL F38	36112-012
DIMENSION	38mm x 115mm (1.5" x 4.5")
MOUNTING	Suspension
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	6" – 8'/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	<b>Standard</b> 135LM/W@3500K / <b>High</b> 150LM/W@3500K*
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

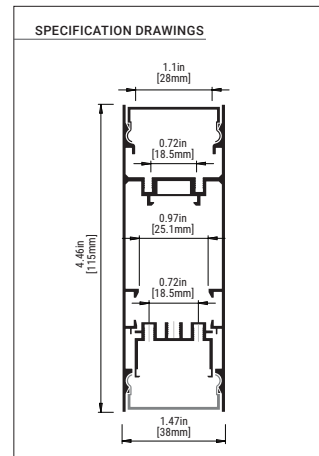

\*PLEASE CONSULT FACTORY

ARCHITECTURAL PROFILES  
LED Linear Lighting System


Fase<sup>1</sup>  
33 West Beaver Creek Road,  
Richmond Hill, Ontario, Canada

ARCHITECTURAL PROFILE - F38


F38 SUSPENSION




MODEL F38	36053-018
DIMENSION	38mm x 75mm (1.5" x 2.95")
MOUNTING	Suspension Mount
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8"/Continuous Run*
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGE	<b>Standard</b> 135LM/W@3500K / <b>High</b> 150LM/W@3500K*
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

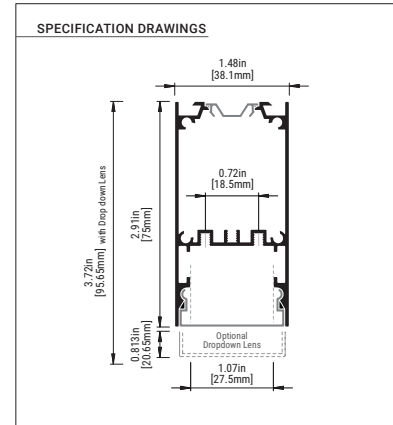

F38 RECESSED

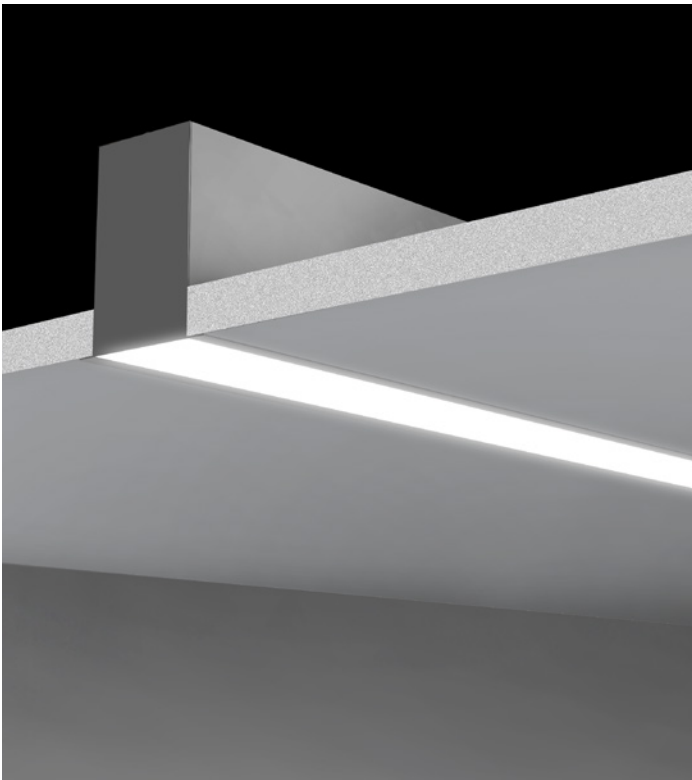

MODEL F38	37641-016
DIMENSION	38mm
MOUNTING	Recessed Mount
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8"/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGE	<b>Standard</b> 135LM/W@3500K / <b>High</b> 150LM/W@3500K*
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

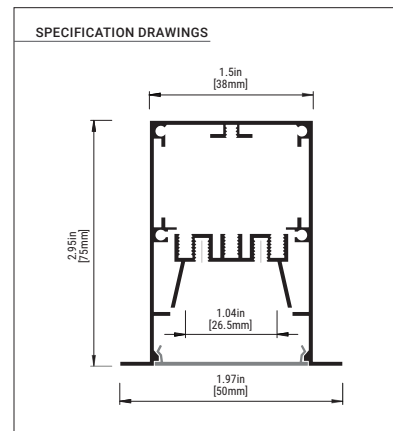

\*PLEASE CONSULT FACTORY

ARCHITECTURAL PROFILES  
LED Linear Lighting System

Fase<sup>1</sup>  
33 West Beaver Creek Road,  
Richmond Hill, Ontario, Canada

DRIVER OPTIONS


OS1	1% Dimming (0-10V)
TRI	TRIAC Dimmable LED Driver
TW	Tuneable White (1500K-6500K)
HL1	Lutron HI-LUME 1% 2-wire LED Driver
ES	Lutron Digital Ecosystem
5ES	5 Series Ecosystem; 5% Dimming
DTW	Dim To Warm

SAMSUNG BOARD TECHNICAL SPECIFICATION


MODEL	Samsung Breakaway 44 inch
POWER CONSUMPTION	31W
LUMINOUS FLUX	Standard: 4185lm @ 3500K High: 4650lm @ 3500K
LUMINOUS EFFICACY	Standard: 135lm/W High: 150lm/W


WIRE FEED POSITIONS

APPLICATION: RECESSED, WALL MOUNT

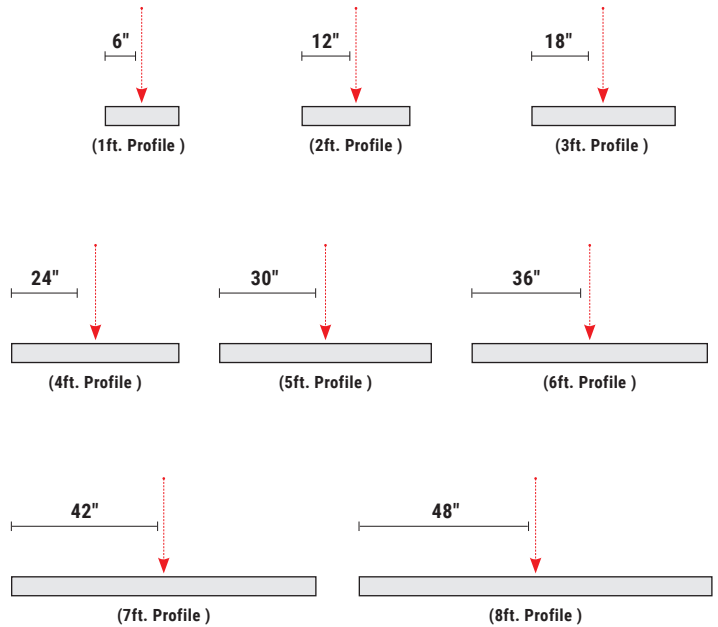

APPLICATION: SUSPENSION

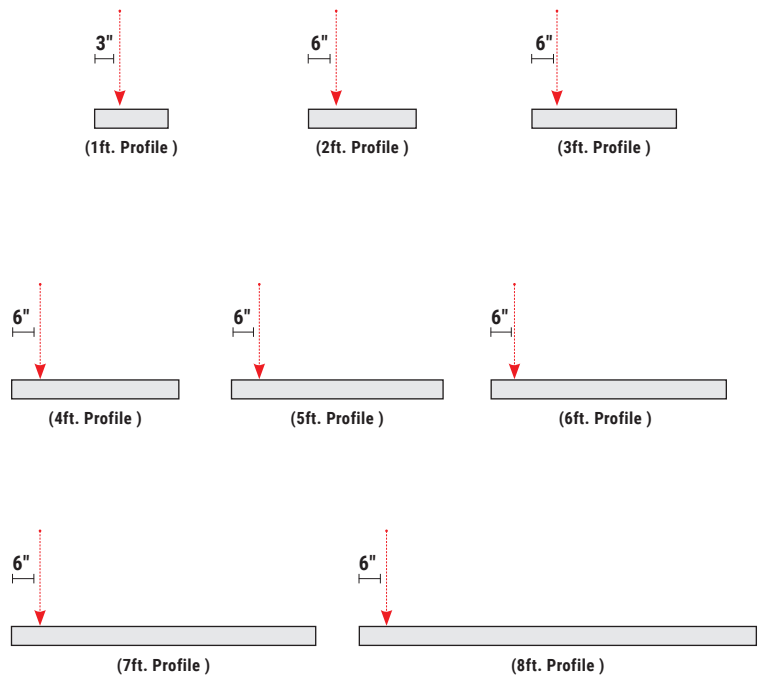

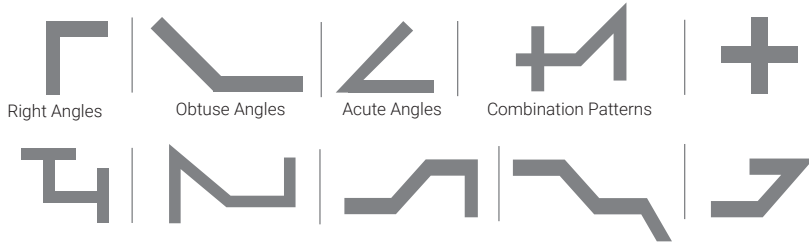

PATTERNS			
<b>S - X</b>	Square		
<b>R - XY</b>	Rectangle		
<b>U - XYZ</b>	U-Shape		
<b>L - XY</b>	L-Shape		
<b>C</b>	Custom Pattern		
<b>Standard Patterns Minimal Lengths</b>			
<p>Square</p>	<p>Rectangle</p>	<p>U-Shape</p>	<p>L-Shape</p>
<p>X = 23" min. Y = 23" min.</p>		<p>X = 23" min. Y = 23" min. Z = 23" min.</p>	<p>X = 23" min. Y = 23" min.</p>
<b>Custom Patterns</b>		<b>Corner</b>	
<p>"T"</p>		<p>"X"</p>	
		<p>All corners are mitre cut and customizable to any degree.</p>	

