


ROUTE



Fase¹

CONSTRUCT
MAST
MUCCI
ROUTE

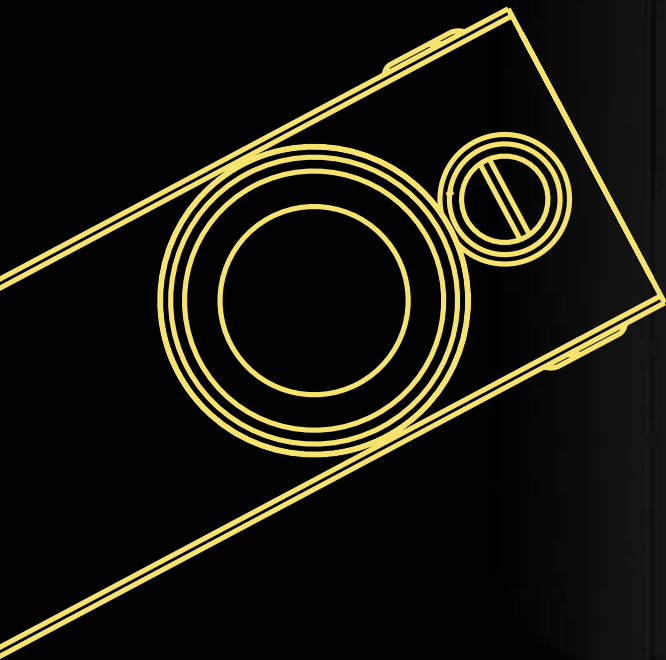

The Route System is UL Listed to ensure safe operation for many years to come. We want to ensure your success with every project you tackle. We're also offering a 5 year limited warranty.





Introducing
ROUTE

The Route is the way to go when large lighting layouts need an architectural look. Whether it be lighting a grand entrance to your home or lighting the floor of your retail space, the Route has the flexibility to adapt to your lighting needs. From pendants to flush mounted modules, the Route has you covered.

MOUNT CHOICES



PENDANT




TRIMLESS RECESSED



SURFACE MOUNT





MOUNT BETWEEN WALLS
OPTION 1

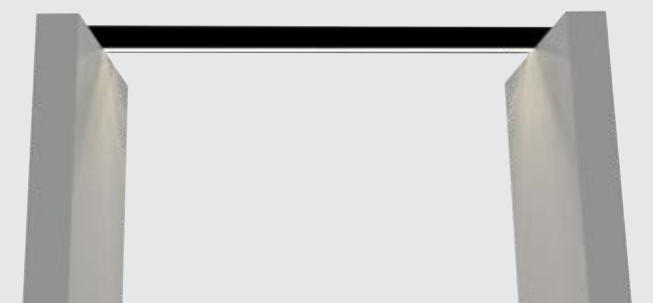



MOUNT BETWEEN WALLS
OPTION 2

MOUNTING OPTIONS

SURFACE MOUNT / PENDANT / MOUNTED BETWEEN WALLS

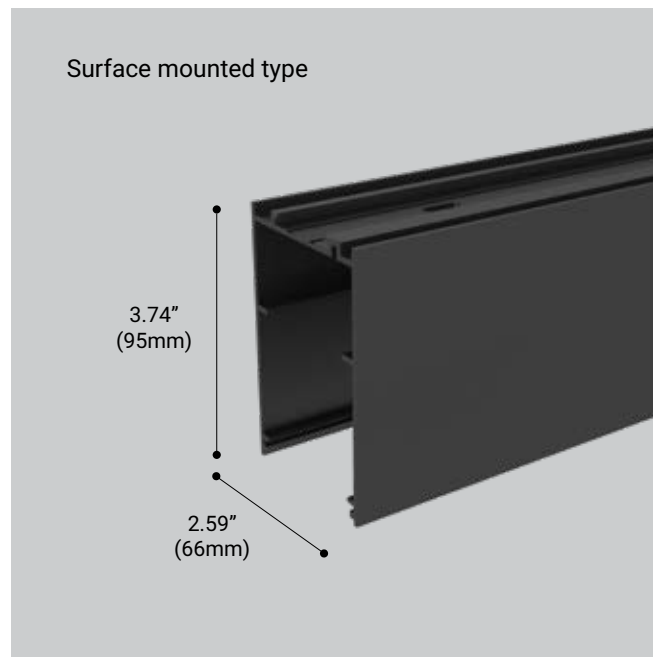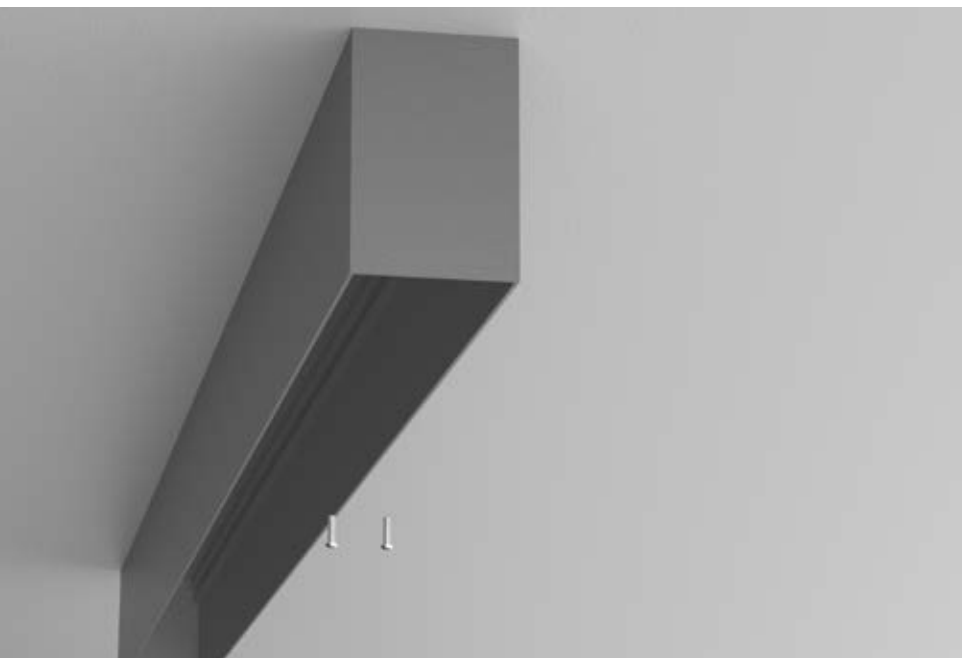

TRIMLESS RECESSED

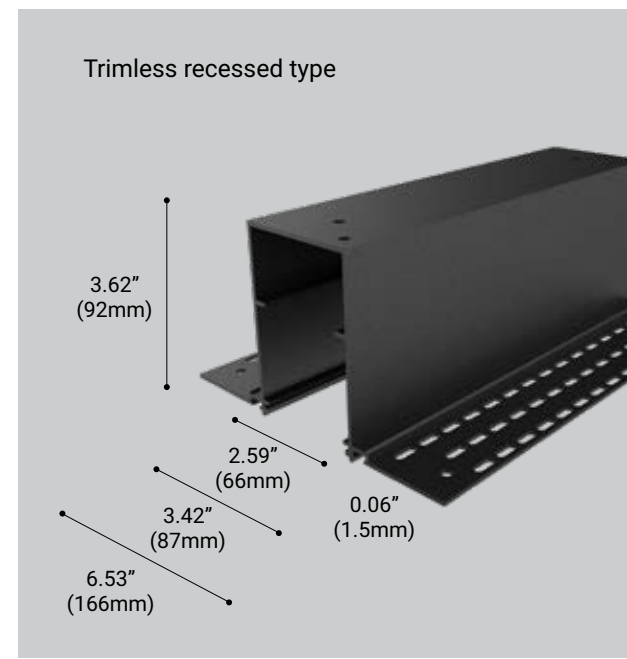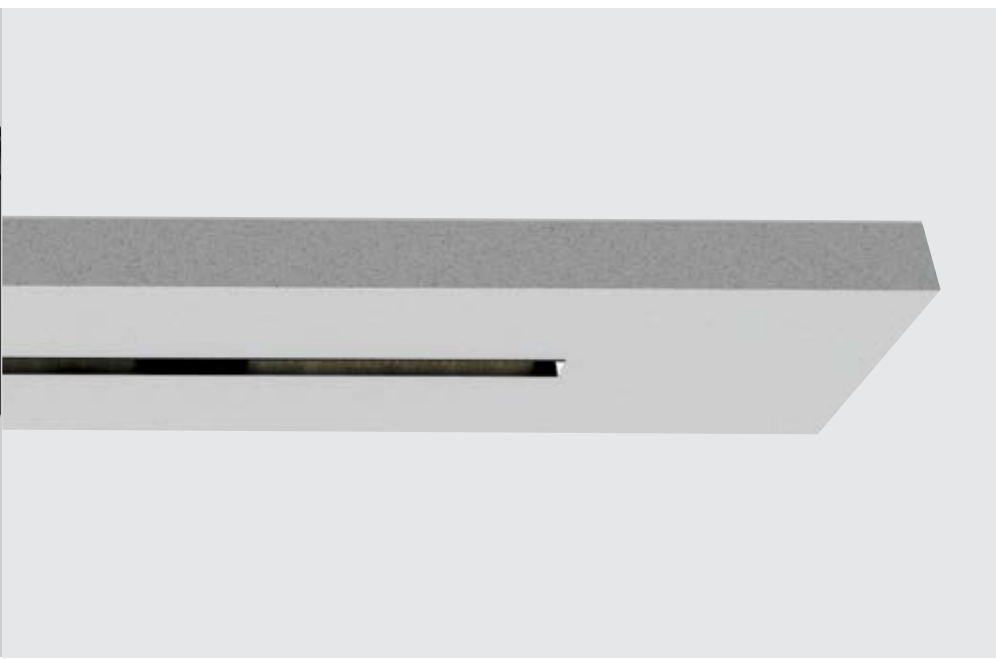

- 36433* 6ft. (1828mm)
- 36434* 8ft. (2438mm)
- 36435* 10ft. (3048mm)


Finishes: Black

*Field Cuttable. Please consult factory.

CONNECTIONS & CORNER PROFILE OPTION:



36439-01
Horizontal Corner L-Shaped
Connector for Ceiling

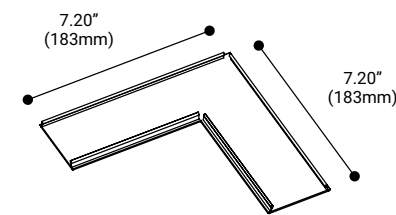

- 36436* 6ft. (1828mm)
- 36437* 8ft. (2438mm)
- 36438* 10ft. (3048mm)



Finishes: Black

*Field Cuttable. Please consult factory.


CONNECTIONS & CORNER PROFILE OPTION:




36440-01
Trimless Recessed
Horizontal Corner

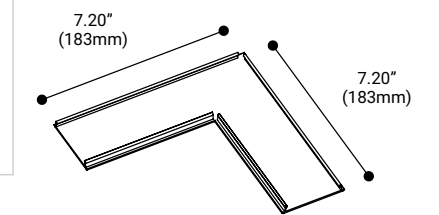


36441-01
End Cap

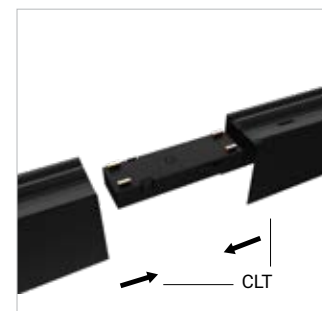

36442-013
Connecting Bracket




36441-01
End Cap

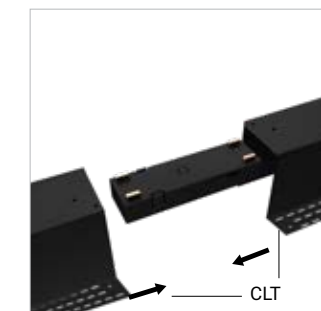

36443-017
Connecting Bracket



SPOT

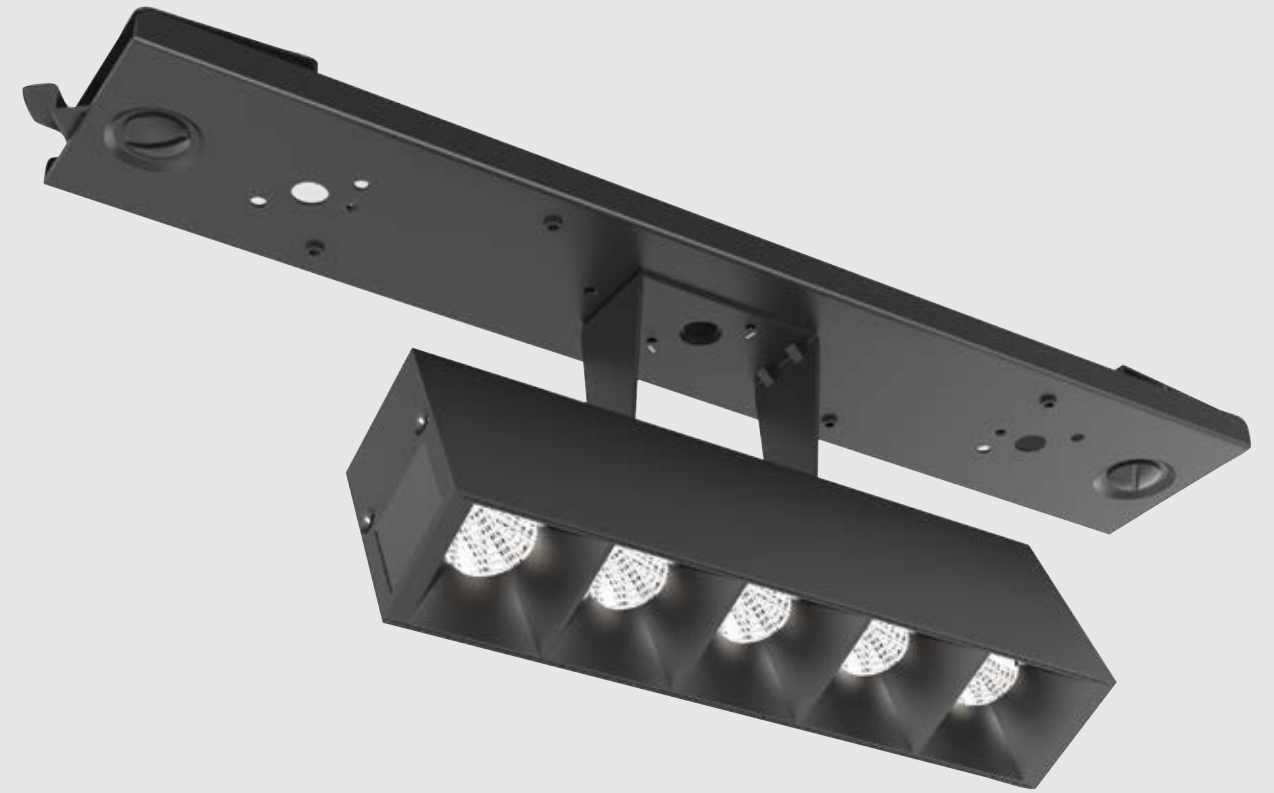


MULTIPLES

LIGHT CHOICE

Each Construct module sports an aluminum body with powder coated finish and aluminum die cast trim that makes this versatile collection extremely durable. Its housing design with proprietary hidden heat sink mechanism protects LED life for longevity as it increases the heat flow away by absorbing thermal energy and then dispersing it into the surrounding ambient air.



DOWNLIGHT

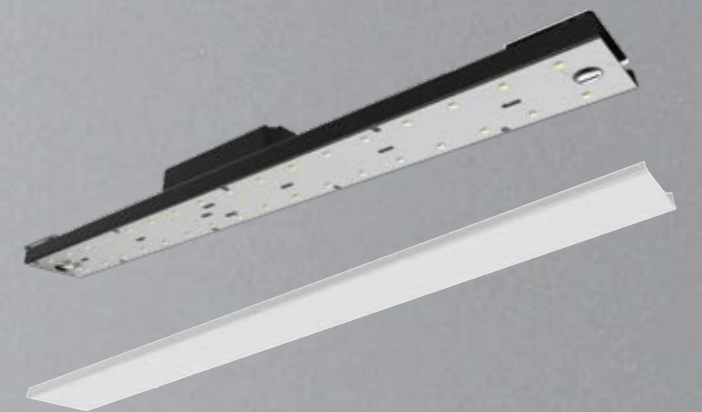

LENS

SPOT

36458 / 36459 / 36460 / 36461

The spot module is the best choice for directional lighting to highlight specific pieces that deserve that extra attention. For hanging art, sculptures, and even a little reading nook, you can shape the perfect ambiance by adding supplementary layered lighting.



Modules available in black

STANDARD SPECIFICATIONS

Integrated LED
Beam angle: 30°
Kelvin: 3000K
CRI: 90+

ELECTRICAL

Input voltage: 120V AC

36458 - TRIAC
36459 - 0-10V

LAMPING

LED Consumption: 16.5W
Delivered Lumen: 700lm

DIMENSIONS

Module: 2.51"DIA x 11.81"W x 3.58"H



PHOTOMETRICS

See pg 28 for complete photometrics

CUSTOMIZATION

For customization, please consult Eurofase

36460 - TRIAC
36461 - 0-10V

LAMPING


LED Consumption: 30W
Delivered Lumen: 1400lm

DIMENSIONS


Module: 2.51"DIA x 11.81"W x 3.58"H



SPECIFICATION DRAWINGS

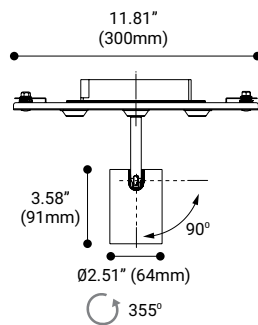

SPECIFICATION DRAWINGS

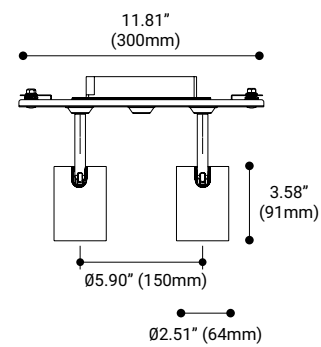

DOWN LIGHT

36456 / 36457

This module offers fixed directional down lighting for general illumination. With its multiple light sources, you get a wider coverage for larger areas.



Modules available in black

LAMPING

Integrated LED
LED Consumption: 30W
Beam angle: 38°
Kelvin: 3000K
Lumen per head: 2500lm
CRI: 90+

ELECTRICAL

Input voltage: 120V AC

DIMENSIONS

Module: 11.81"L x 1.97"W x 2.36"H

36456 - TRIAC

36457 - 0-10V


PHOTOMETRICS

See pg 28 for complete photometrics

CUSTOMIZATION

For customization, please consult Eurofase

SPECIFICATION DRAWINGS

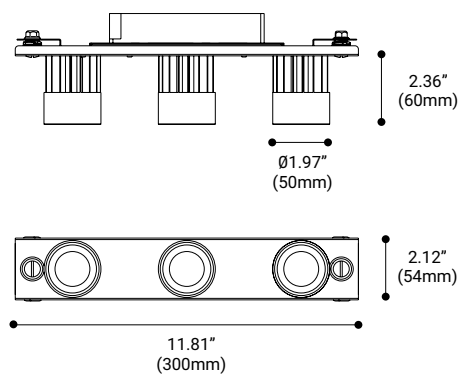

IP20



MULTIPLES

36465 / 36463 / 36462

This module offers full control for multiple spot light applications. With an adjustable 90° tilt capability, you can direct attention towards specific areas and objects.



Modules available in black

STANDARD SPECIFICATIONS

Integrated LED
Beam angle: 30°
Kelvin: 3000K
CRI: 90+

ELECTRICAL

Input voltage: 120V AC

36465 - TRIAC
36878 - 0-10V



LAMPING

LED Consumption: 36W
Delivered Lumen: 2550lm

DIMENSIONS

Module: 23.62"L x 18.66"W x 2.12"H

36463 - TRIAC
36464 - 0-10V



LAMPING

LED Consumption: 24W
Delivered Lumen: 1700lm

DIMENSIONS

Module: 23.62"L x 12.52"W x 2.12"H

36462 - TRIAC
36703 - 0-10V






LAMPING

LED Consumption: 12W
Delivered Lumen: 850lm

DIMENSIONS

Module: 11.81"L x 6.41"W x 2.12"H

SPECIFICATION DRAWINGS

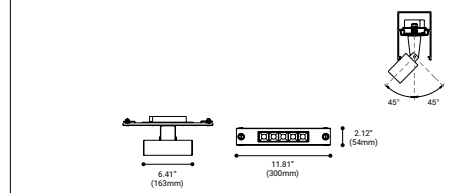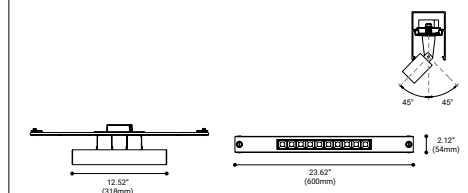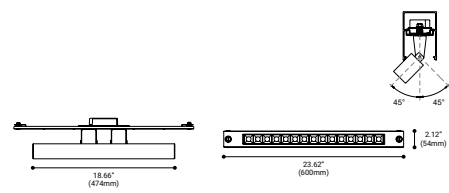


IP20



LENS

36372 / 36373 / 36374

The lens module is the perfect choice for consistent lighting that spans a large area. Available in three sizes, the lens offers high quality diffused lighting for various spaces.

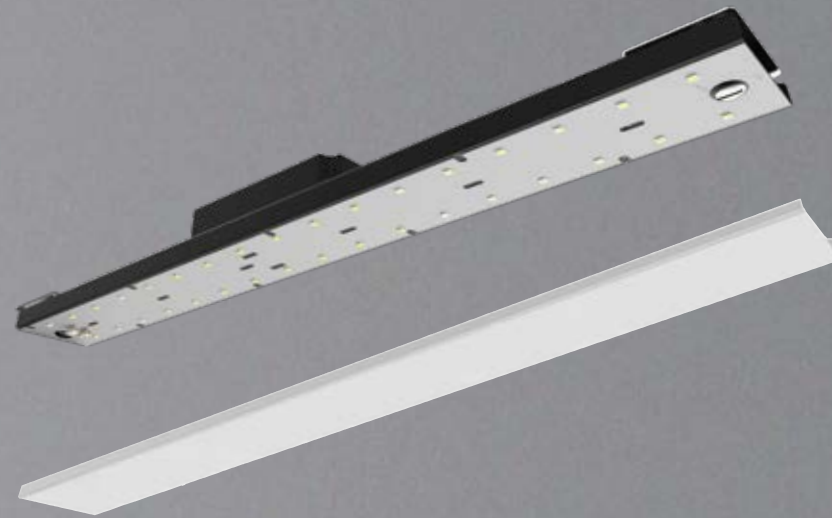

Modules available in black

STANDARD SPECIFICATIONS

Integrated LED
Beam angle: 115°
Kelvin: 3000K
CRI: 90+

ELECTRICAL

Input voltage: 120V AC

36455 - TRIAC
36704 - 0-10V



LAMPING

LED Consumption: 40W
Delivered Lumen: 1800lm

DIMENSIONS

Module: 35.43"L x 3.74"W

36453 - TRIAC
36454 - 0-10V



LAMPING

LED Consumption: 35W
Delivered Lumen: 1400lm

DIMENSIONS

Module: 23.62"L x 3.74"W

36451 - TRIAC
36452 - 0-10V






LAMPING

LED Consumption: 20W
Delivered Lumen: 570lm

DIMENSIONS

Module: 11.81"L x 3.74"W

SPECIFICATION DRAWINGS

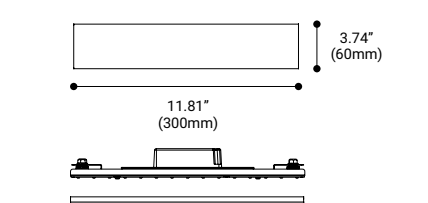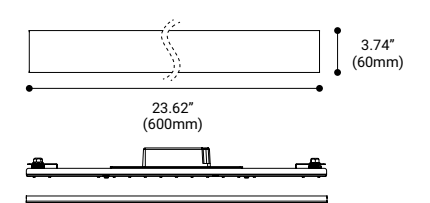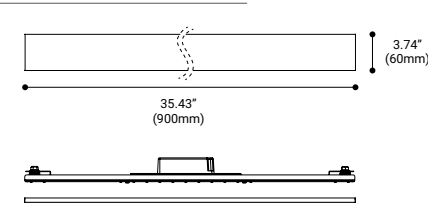




ACCESSORIES

		RECESSED	MOUNT BETWEEN WALLS (Option A)	MOUNT BETWEEN WALLS (Option B)	SURFACE MOUNTED	PENDANT
END CAP 36441-01		•	•	•	•	•
CONNECTING BRACKET 36442-013					•	
CONNECTING BRACKET 36443-017		•				
CABLE TIE 36444-019		•	•	•	•	•
POWER JOINT (TRIAC DIMMING) JUNCTION BOX INCLUDED 36833-016		•	•	•	•	•
POWER JOINT (0-10V DIMMING) JUNCTION BOX INCLUDED 36834-013		•	•	•	•	•
MOUNTING CLIP 36445-017			•			
HANGING WIRE 36449-012			•			
MOUNTING CLIP 36446-014				•		
PENDANT KIT WITH POWER CORD 36448-01						•
PENDANT KIT WITHOUT POWER CORD 36450-01						•
RECESSED MOUNTING CLIP 38722-011		•				
1 METER (39") EXTENSION CABLE 36902-019		•	•	•	•	•






INSTALLATION

3 WIRES - TRIAC DIMMING

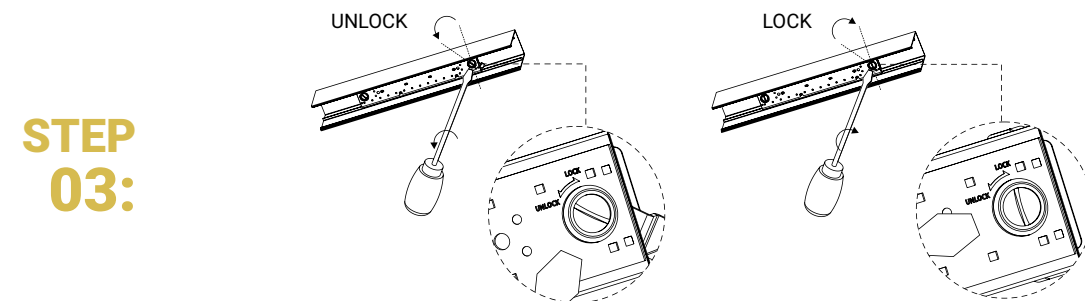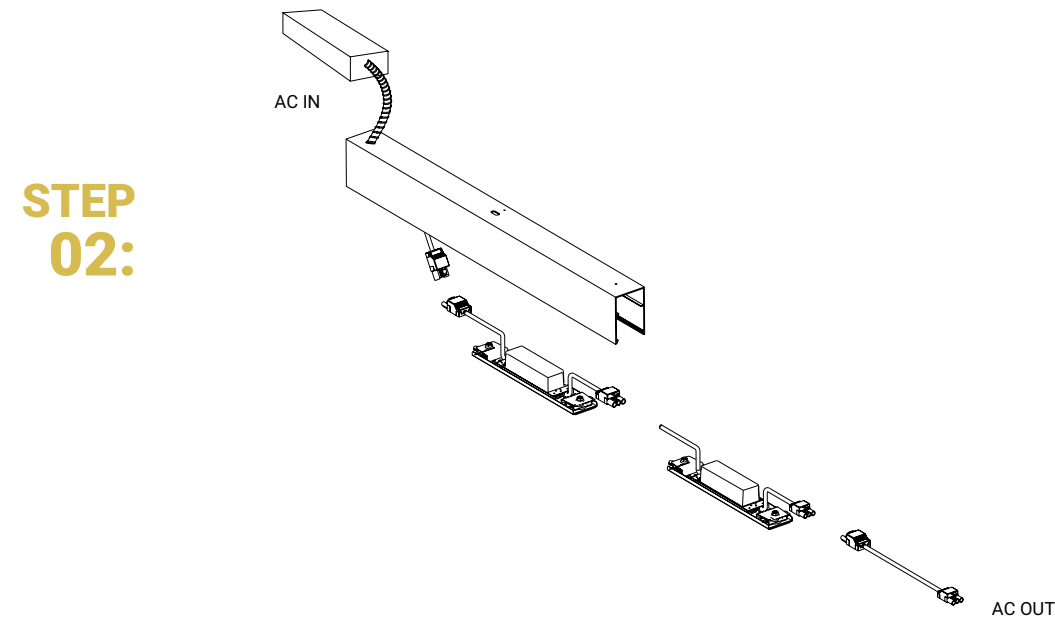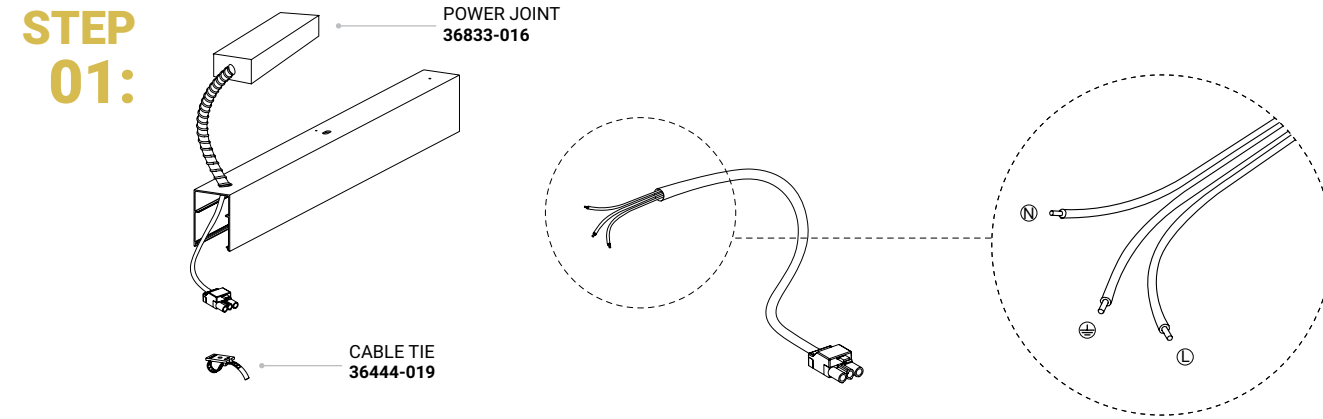

5 WIRES - 0-10V DIMMING

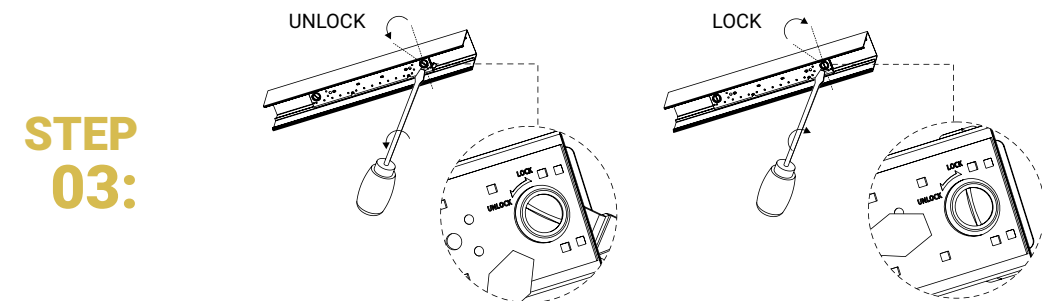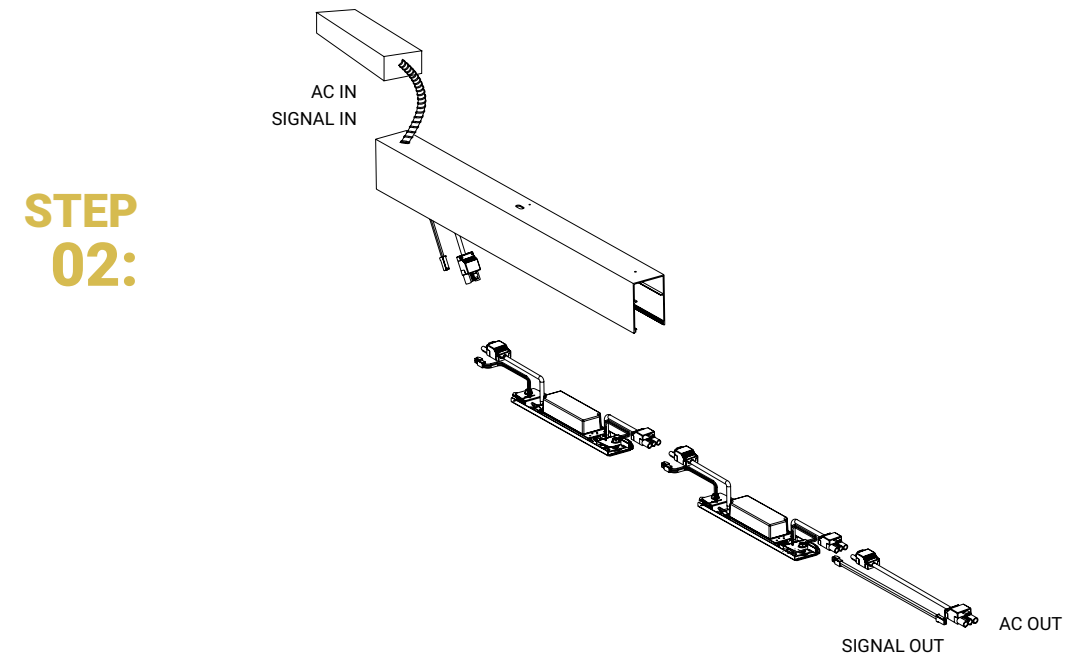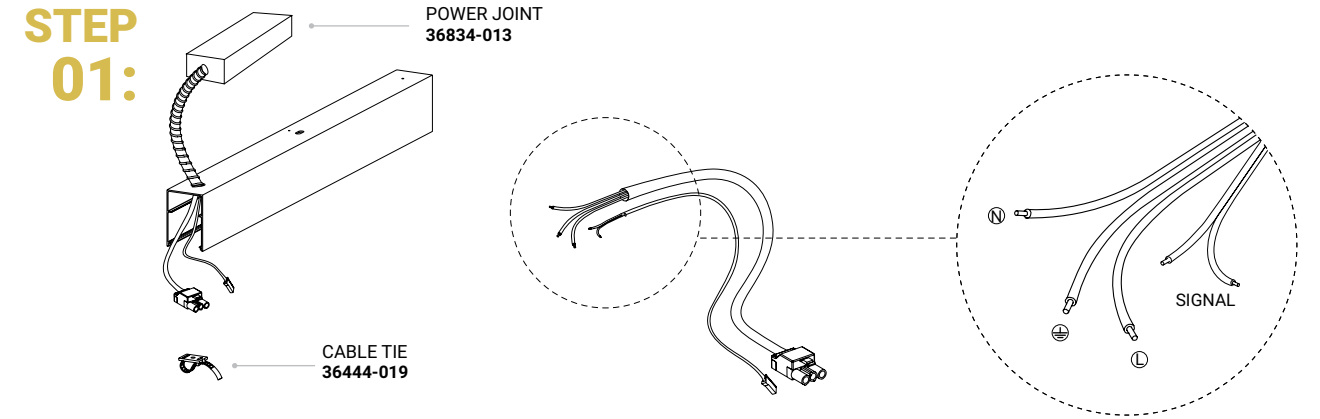

INSTALLATION


STEP 04:




STEP 05:



STEP 06:

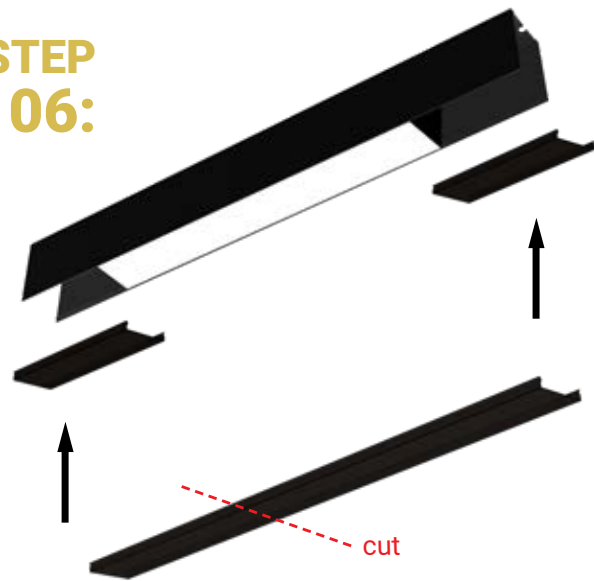

STEP 07:

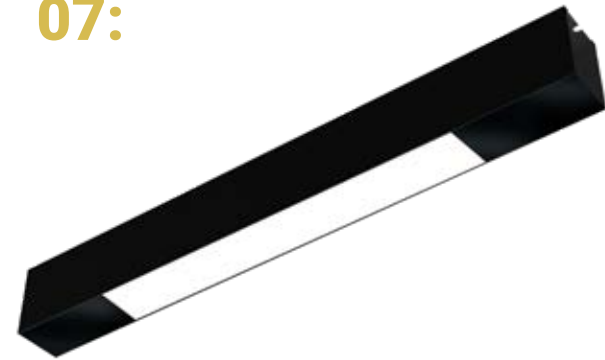





Aluminum profile section without LED module can be used as building material.




LED module can be installed and shift easily to light up the required space.

INSTALLATION

APPLICATION TRIMLESS RECESSED

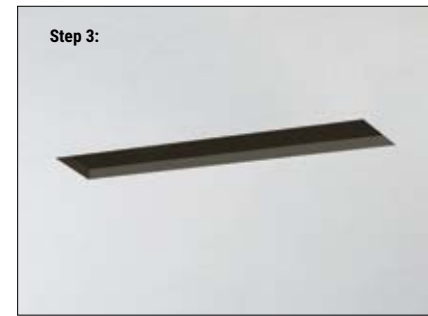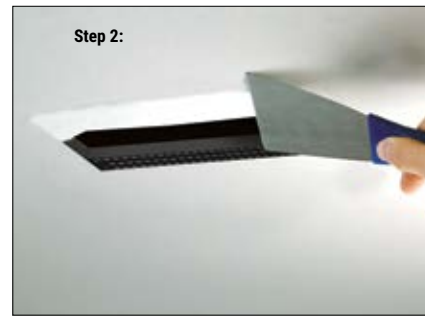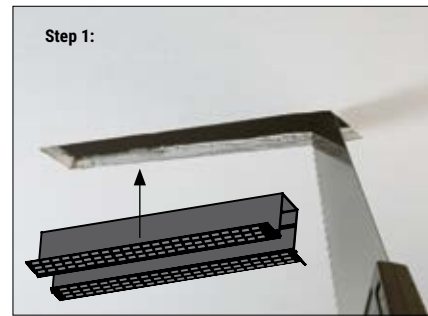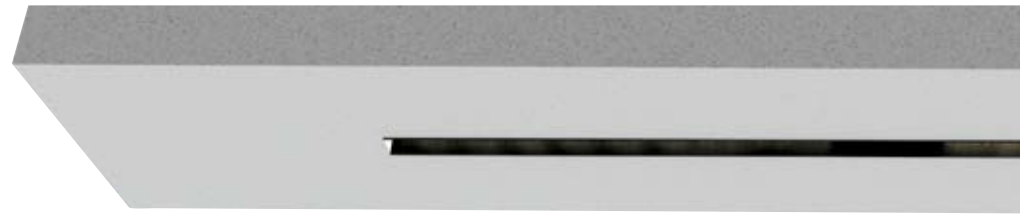


APPLICATION SURFACE MOUNTED

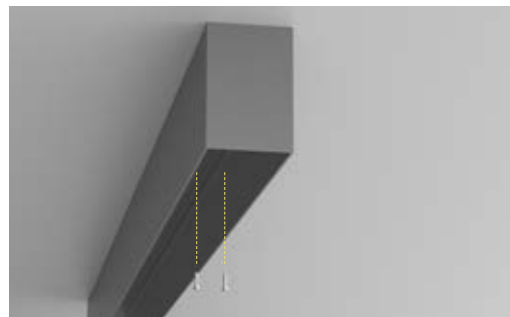



Use screws (not included) to secure to drywall

APPLICATION PENDANT

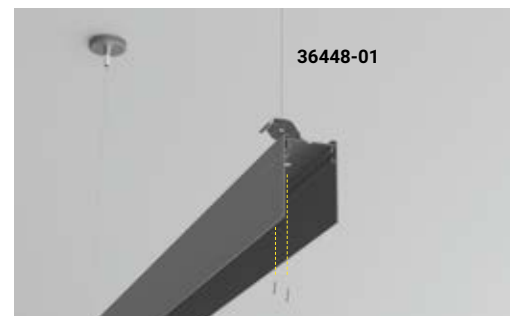


Use the Pendant Kit to secure the track section.

APPLICATION MOUNT BETWEEN WALLS OPTION 1

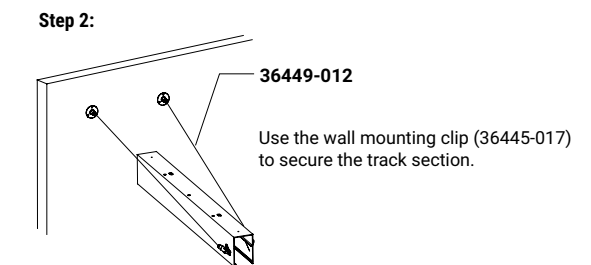

APPLICATION MOUNT BETWEEN WALLS OPTION 2



Use the mounting clip (36446-014) to secure the track section.


PHOTOMETRICS

SPOT

36458



H(m)	D(m)	E(lx)
30°		
1.0	0.58	1560
2.0	1.16	389
3.0	1.74	173
4.0	2.32	97
5.0	2.91	62




LENS

36455




H(m)	D(m)	E(lx)
115°		
1.0	3.05	659
2.0	6.11	164
3.0	9.16	73
4.0	12.22	41
5.0	15.28	26



36453




H(m)	D(m)	E(lx)
115°		
1.0	3.03	441
2.0	6.17	110
3.0	9.11	49
4.0	12.15	27
5.0	15.19	17



36451



H(m)	D(m)	E(lx)
115°		
1.0	3.05	212
2.0	6.11	53
3.0	9.17	23
4.0	12.23	13
5.0	15.29	8




MULTIPLES

36465




H(m)	D(m)	E(lx)
30°		
1.0	0.61	5925
2.0	1.22	1481
3.0	1.83	658
4.0	2.44	370
5.0	3.05	237



36463




H(m)	D(m)	E(lx)
30°		
1.0	0.62	3791
2.0	1.24	947
3.0	1.86	421
4.0	2.48	236
5.0	3.10	151



36462



H(m)	D(m)	E(lx)
30°		
1.0	0.61	1905
2.0	1.22	476
3.0	1.84	211
4.0	2.45	119
5.0	3.07	76




DOWNLIGHT

36462



H(m)	D(m)	E(lx)
38°		
1.0	0.67	3884
2.0	1.34	971
3.0	2.01	431
4.0	2.68	242
5.0	3.35	155



Let's customize

Our Eurofase Lighting Specialist will work with you to customize a lighting system of your choice; from choosing the amount of modules, custom shapes and lengths.

TEL: 905.695.2055
TOLL FREE: 1.800.660.5391
EMAIL: orders@fase1lighting.com

Fase¹

33 West Beaver Creek Road,
Richmond Hill, Ontario Canada L4B 1L8

DALLAS TRADE MART
Eurofase Showroom, Suite #4002

tel 905.695.2055
fax 905.695.2056

toll free 1.800.660.5391
toll free 1.800.660.5390



Printed in Canada
© 2021 Eurofase Inc. All rights reserved.

Eurofase Inc. reserves the right to make alterations to the construction and design of products shown in this catalog in order to meet the laws or regulations of any authorized governing organization. The use of products shown in this catalog must comply with local building codes.