

SUBTRACKT SYSTEM



FEATURES

Beneath the surface sits the Subtrackt collection. This structural system is designed to seamlessly integrate into the architecture. An extremely versatile recessed system allows for perfect cove applications with optional single or dual channels to line your ceiling in a geometric formation or squared design. The modules provide four way movements offering additional angles to optimize directional illumination with its mechanical arm design.

NUMBER	38656
WATTAGE	15W Integrated LED
BEAM ANGLE	40°
VERTICAL ROTATION	90°/200°
HORIZONTAL ROTATION	130°
KELVIN	3000K/3500K/4000K
LUMENS	1380lm
CRI	90+
DIMMING	TRIAC
ADJUSTABLE HEAD	Yes
COLOR	Black
INPUT	120-277V

SHOWN: Single channel recessed slot, 38656-30-01


CERTIFICATIONS




ORDERING TABLE

SUBTRACKT HEAD	KELVIN	COLOR	PRODUCT CODES
38656	3000K	BLACK (01)	38656-30-01
		WHITE (02)	38656-30-02
	3500K	BLACK (01)	38656-35-01
		WHITE (02)	38656-35-02
	4000K	BLACK (01)	38656-40-01
		WHITE (02)	38656-40-02

TRACK	COLOR	PRODUCT CODES
38653	BLACK (01)	38655-01
	WHITE (02)	38653-02
41900	BLACK (01)	41900-01
	WHITE (02)	41900-02

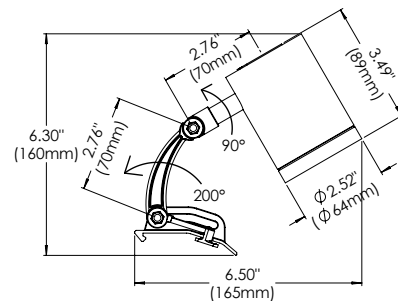


COVE MEASUREMENTS

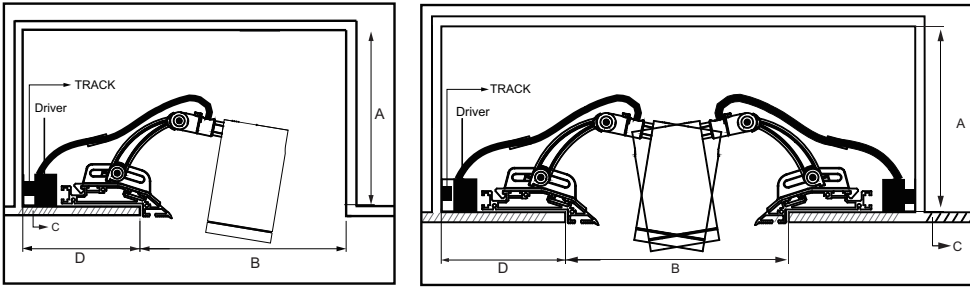


SERIES	A	B
38656	Minimum.11 3/4"(300mm)	Minimum.6"(150mm)
38657	Minimum.11 3/4"(300mm)	Minimum.7 1/2"(190mm)

SAMPLE APPLICATIONS


SINGLE





DOUBLE



GRAZER



PHOTOMETRICS

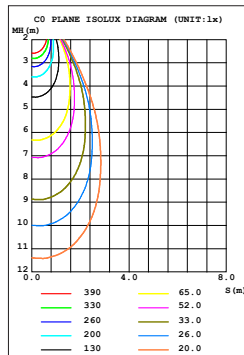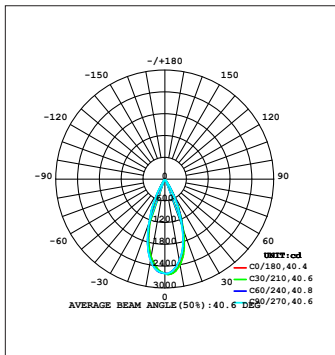


15W SPOT

MOUNTING CHANNELS




38653-01
CHANNEL MOUNT, 6.5FT, BLACK

38653-02
CHANNEL MOUNT, 6.5FT, WHITE



41900-01
CHANNEL MOUNT SQUARE, BLACK

41900-02
CHANNEL MOUNT, SQUARE, WHITE

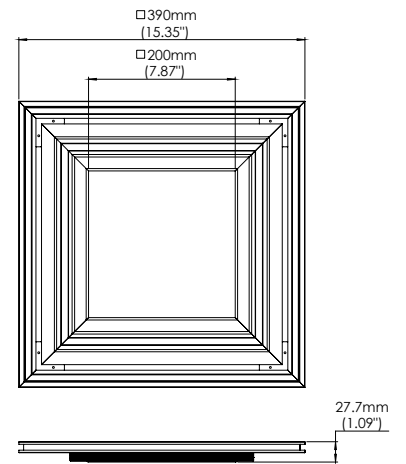

POWER CONNECTION

HALO TRACK

- Single circuit track, 3-conductor, 20A maximum per circuit
- Can be surface mounted on walls or ceilings
- Field cuttable to desired length
- Use components to build any desired configuration
- Includes 2 dead-end covers

1002 2-FOOT TRACK



1004 4-FOOT TRACK



1008 8-FOOT TRACK



-01 Black



-02 White

