

TANGO


Fase¹



BRAVO
OSCAR
TANGO





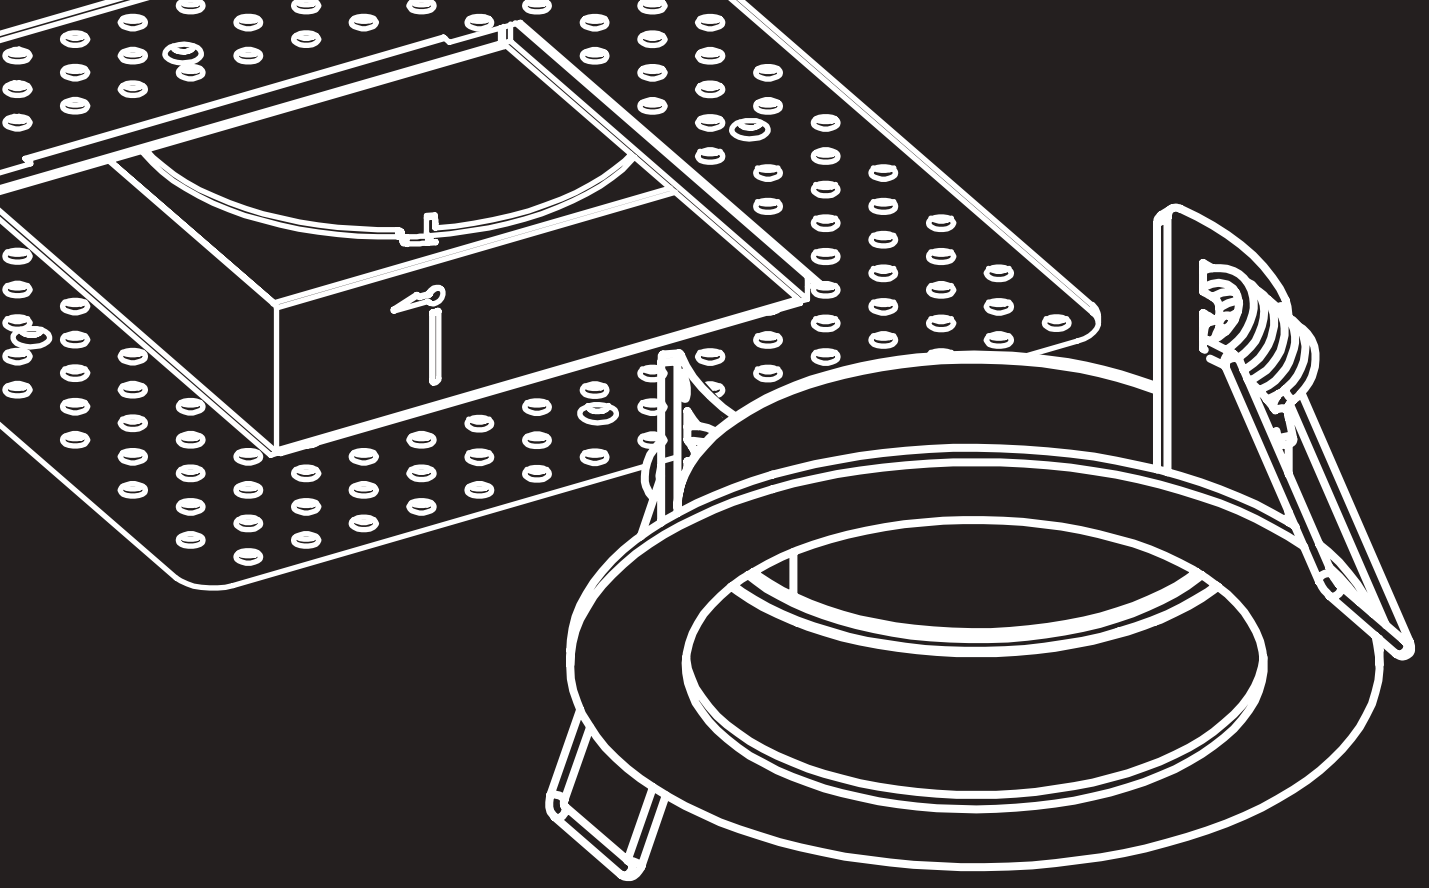



T
A
N
G
G
O

Introducing

THE TANGO


Tango is a specification grade LED collection, offering multiple options for design and functionality. It offers round and square, trim and trimless, 1-, 2-, and 3-light options, along with several task specific trim designs. Tango features 90+ CRI high performance LED chips, drivers with multi dimming capabilities, and supports industry leading ease of installation and services.

The sleek and contemporary design of the Tango collection will illuminate your space with precision and style. Let's tango.

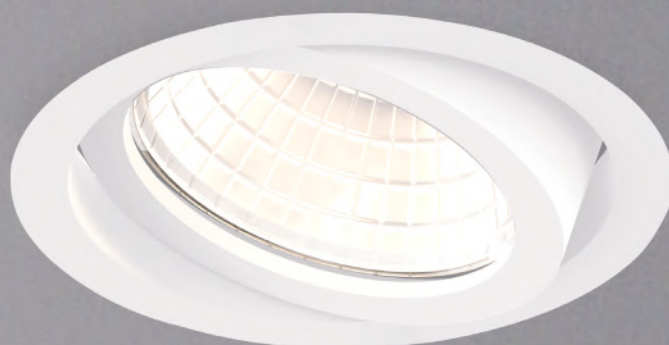
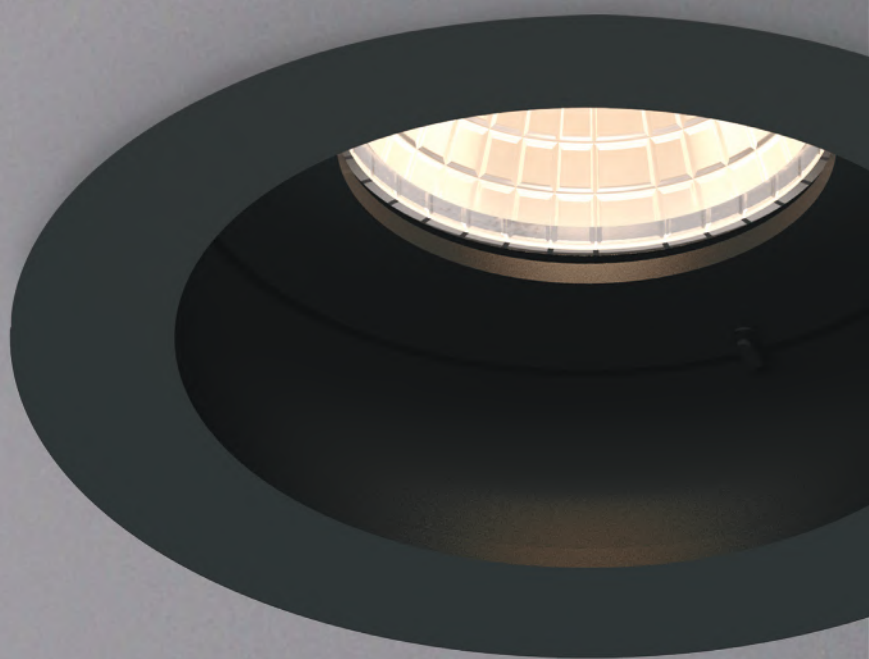


LIGHT CHOICE

Each Tango module sports an aluminum body with powder coated finish and aluminum die cast trim that makes this versatile collection extremely durable. Its housing design with proprietary hidden heat sink mechanism protects LED life for longevity as it increases the heat flow away by absorbing thermal energy and then dispersing it into the surrounding ambient air.

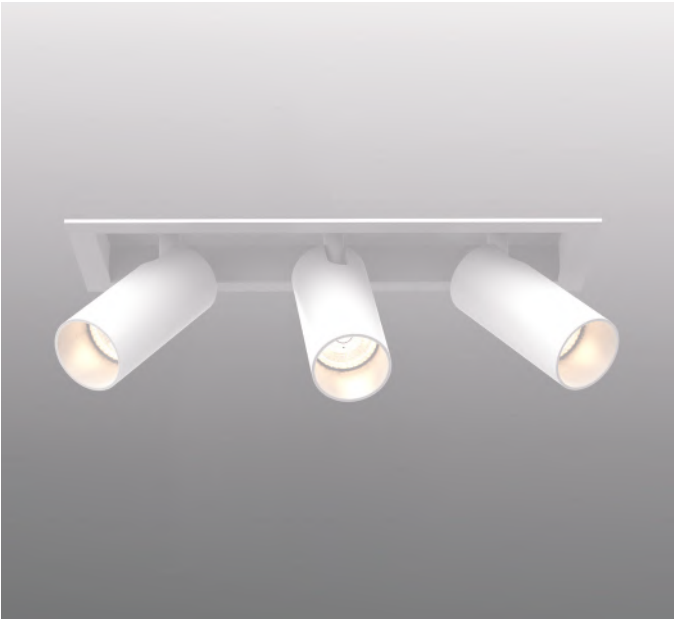

FIELD ADAPTATIONS



FIXED


As its name implies, this is an immovable light. Directed downward, the angle and size is based on the angle of the beam within its globe. Super easy to install, this option provides even illumination and makes this the common favorite for general lighting.



All housing available in white, black, round, square, trim, trimless, and multiples options

LAMPING



Wattage:	10W	15W
Source:	Integrated LED	Integrated LED
Beam angle:	15°/24°/38°	15°/24°/38°
Kelvin:	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
Lumens:	840lm	1180lm
CRI:	90+	90+
Dimming:	0-10V/ELV/Triac	0-10V/ELV/Triac
Location:	Damp	Damp
Input:	120-277V (347 upon request)	120-277V (347 upon request)
Color:	Black/White	Black/White
Type:	Round/Square	Round/Square
	Trim/Trimless	Trim/Trimless
	1-light/2-light/3-light	1-light/2-light/3-light

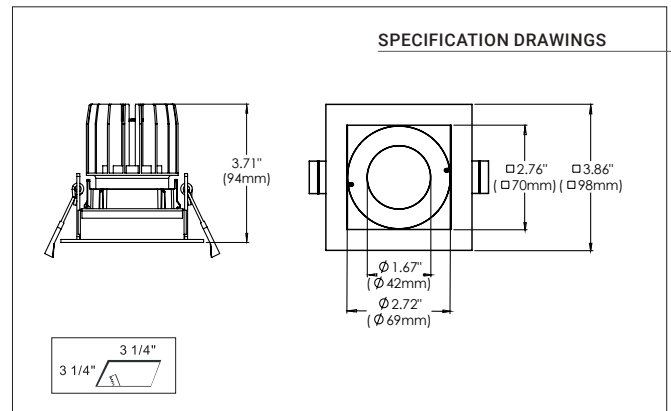



EXAMPLE

Ceiling cut-outs will vary depending on housing. Please refer to each specifications. Example shown is for a square 1-light with trim.

10W WIDE



15W WIDE




** See pg 28 for full photometrics

*** For customization, please consult Eurofase



GIMBAL

A pivoting support within the housing to limit the lamp from extending outside the ceiling. Rotating the lens around its center of gravity, you can direct light wherever needed to allow a range of directional lighting. The flexibility of its adjustable downlights make this an ideal choice for task and accent lighting.

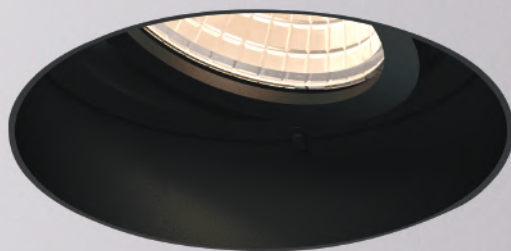


All housing available in white, black, round, square, trim, trimless, and multiples options

LAMPING

Wattage:	10W	15W
Source:	Integrated LED	Integrated LED
Beam angle:	15°/24°/38°	15°/24°/38°
Kelvin:	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
Lumens:	840lm	1180lm
CRI:	90+	90+
Dimming:	0-10V/ELV/Triac	0-10V/ELV/Triac
Location:	Damp	Damp
Input:	120-277V (347 upon request)	120-277V (347 upon request)
Color:	Black/White	Black/White
Type:	Round/Square	Round/Square
	Trim/Trimless	Trim/Trimless
	1-light/2-light/3-light	1-light/2-light/3-light



SPECIFICATION DRAWINGS

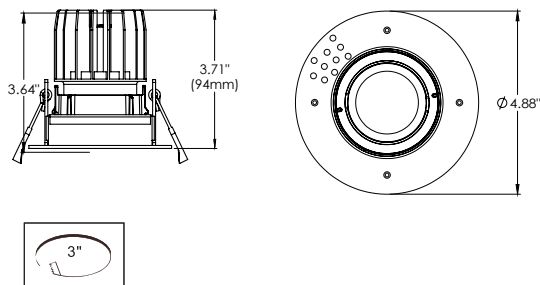



EXAMPLE

Ceiling cut-outs will vary depending on housing. Please refer to each specifications. Example shown is for a round 1-light without trim.

10W WIDE



15W WIDE




** See pg 28 for full photometrics

*** For customization, please consult Eurofase



SPOT*

The spot module is the best choice for directional lighting to highlight specific pieces that deserve that extra attention. For hanging art, sculptures, and even a little reading nook, you can shape the perfect ambiance by adding supplementary layered lighting.

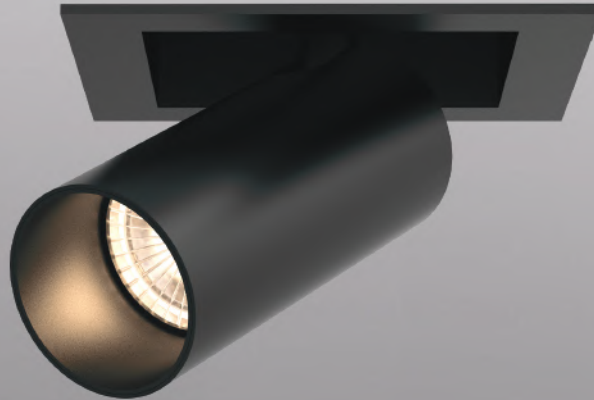


*Module includes lens and reflector inside for complete base



All housing available in white, black, round, square, trim, trimless, and multiples options


LAMPING

Wattage: 15W
 Source: Integrated LED
 Beam angle: 15°/24°/38°
 Kelvin: 2700K/3000K/3500K/4000K
 Lumens: 1060lm
 CRI: 90+
 Dimming: 0-10V/ELV/Triac
 Location: Damp
 Input: 120-277V (347 upon request)
 Color: Black/White
 Type: Round/Square
 Trim/Trimless
 1-light/2-light/3-light

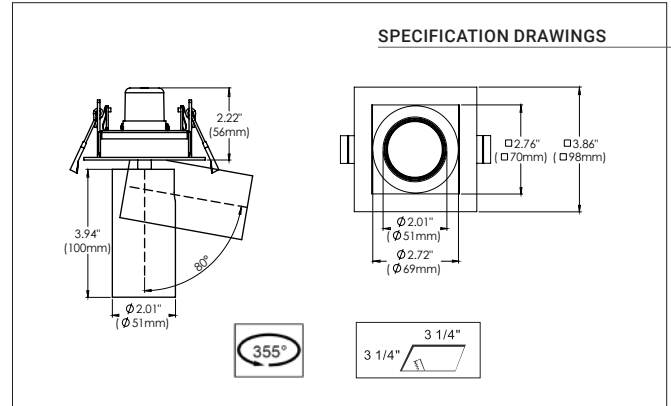

EXAMPLE

Ceiling cut-outs will vary depending on housing. Please refer to each specifications. Example shown is for a 1-light square with trim.



** See pg 29 for full photometrics

*** For customization, please consult Eurofase



SUSPENSION*

This hanging module comes ready-to-install onto the plate. It includes the lens and reflector assembled within.

As the more decorative piece of this collection, the suspension module works just like a hanging pendant but has a sleeker and more compact design. It's small canopy sits flush against the ceiling and is available in a trimless option for a seamless look.






*Module includes lens and reflector inside for complete base



All housing available in white, black, round, square, trim, trimless, and multiples options

LAMPING

Wattage: 15W
 Source: Integrated LED
 Beam angle: 15°/24°/38°
 Kelvin: 2700K/3000K/3500K/4000K
 Lumens: 1060lm
 CRI: 90+
 Dimming: 0-10V/ELV/Triac
 Location: Damp
 Input: 120-277V (347 upon request)
 Color: Black/White
 Type: Round/Square
 Trim/Trimless
 1-light/2-light/3-light

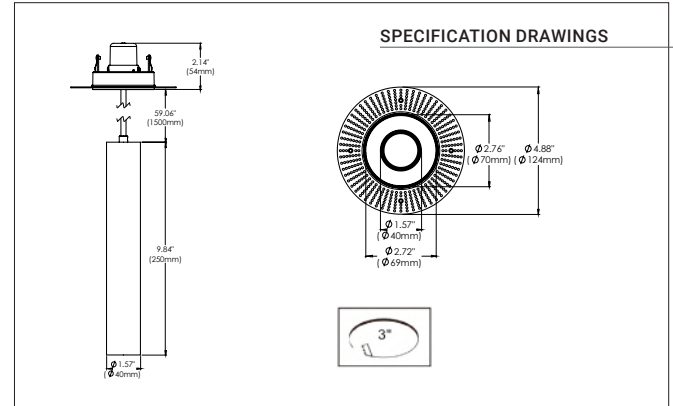

EXAMPLE

Ceiling cut-outs will vary depending on housing. Please refer to each specifications. Example shown is for a 1-light round without trim.

** See pg 29 for full photometrics

*** For customization, please consult Eurofase



PULL DOWN*

This extremely versatile option offers spot lighting that can adapt to the changes of your decor. Through time, it's expected for interiors to change and shift its purpose. With the Pull Down module, you can still provide directional lighting to highlight specific items while keeping your current light system intact.

For galleries and retail spaces, especially, where they are constantly undergoing changes, the Pull Down module can provide specific spot lighting and then convert into a recessed option afterwards for general illumination.






*Module includes lens and reflector inside for complete base



All housing available in white, black, round, square, trim, trimless, and multiples options

LAMPING

Wattage: 15W
 Source: Integrated LED
 Beam angle: 15°/24°/38°
 Kelvin: 2700K/3000K/3500K/4000K
 Lumens: 1060lm
 CRI: 90+
 Dimming: 0-10V/ELV/Triac
 Location: Damp
 Input: 120-277V (347 upon request)
 Color: Black/White
 Type: Round/Square
 Trim/Trimless
 1-light/2-light/3-light

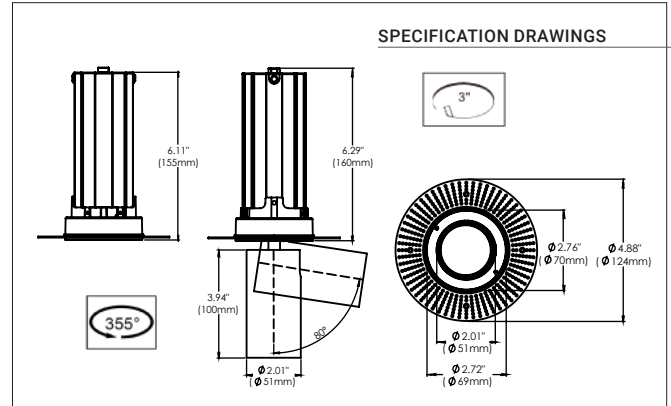

EXAMPLE

Ceiling cut-outs will vary depending on housing. Please refer to each specifications. Example shown is for a 1-light round without trim.

** See pg 29 for full photometrics

*** For customization, please consult Eurofase








01


ACCESSORIES

OPTIC REFLECTORS: Beam Angle

Spot	Narrow 15°
Flood	Medium 24°
Wide Flood	Wide 38°

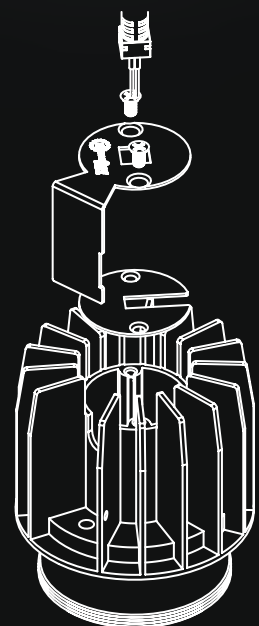

Reflectors installed into the light engine, before the diffusers



02

LENS: Diffuser

Standard Lens (INCLUDED)

Clear glass protective lens

Dichroic Lens

Accurately filter colors to change room ambiance (Orange/Red/Blue/Green)

Spread Lens


Wider beam diffuser to focus on larger objects

Linear Spread Lens

Oval flood beam best suited for wall washing applications

Frosted Lens

Disperses light evenly with a soft, diffused glow

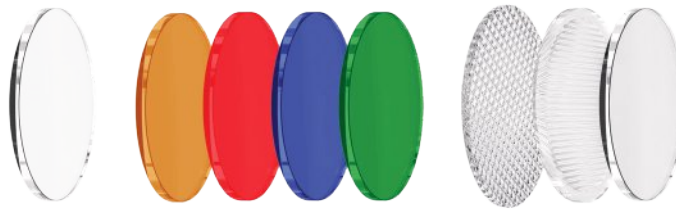

03

ADD-ONS: Extensions

Extension Baffle


This extension baffle focuses the light beam, which reduces light spill and improves lighting efficiency. Adding the extension baffle along with your choice of reflector greatly improves the illumination your downlight produces.

Extension Snoot

Adding an extension tube further supports the ability to control the direction and radius of a light beam. Acting similarly to the extension baffle, the snoot add-on is more for aesthetic purposes. A modern cylinder tube will add a decorative purpose while creating a focused beam of light.

Honeycomb Louvre

This slim filter has lighting comfort properties for optimal illumination. The honeycomb louvre reduces glare, distortion and provides better clarity.

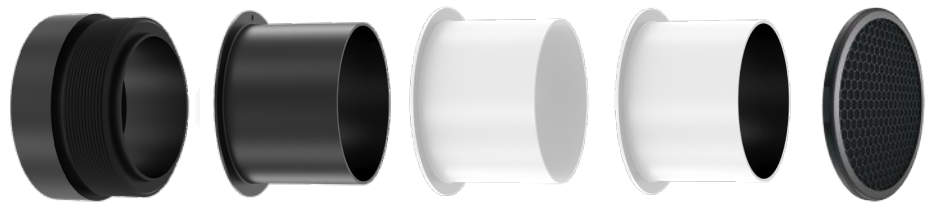

Snoot
(Black ext/int)
(SN1)

Snoot
(White ext/int)
(SN2)

Snoot
(White ext/Black int)
(SN3)

LASTING IMPRESSION


The Tango collection are UL Listed to ensure safe operation for many years to come. We want to ensure your success with every project you tackle. We're also offering a 5 year limited warranty.






HOUSINGS


FIXED




GIMBAL





SPOT




SUSPENSION

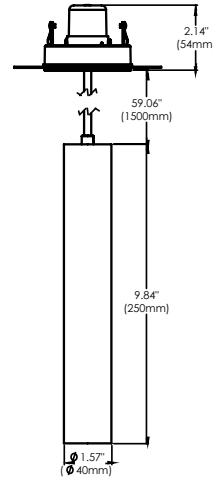


PULL DOWN




1 Light Square Trimless - Bottom View




1 Light Square Trim - Bottom View




1 Light Round Trimless - Bottom View




1 Light Round Trim - Bottom View




2 Light Square Trimless - Bottom View



2 Light Square Trim - Bottom View

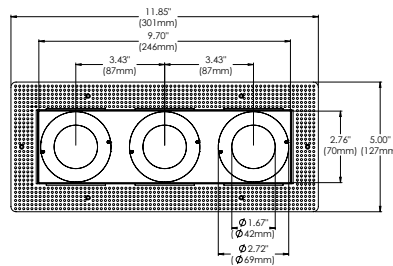

2 Light Square Trimless - Bottom View

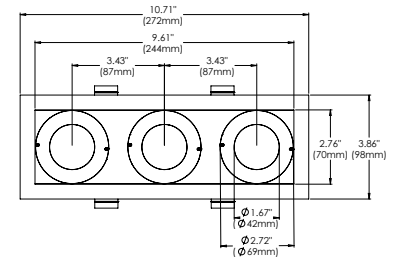


2 Light Square Trim - Bottom View

ELECTRICAL


- Class 2 dimmable constant current driver (included)
- Driver box mates to fixture by 12" flexible BX cable
- Thermally protected
- Input voltage: 120V. For 277V and 347V input options consult Fase1 Lighting.

HOUSING


- 18 gauge powder coated steel housing
- Remodel housing complete with adjustable mounting clips suitable for 1/2" and 5/8" drywall
- New construction plate, insulated ceiling box and airtight IC box sold separately (refer to housing options)




NCP and IC/AT
1-Light Round

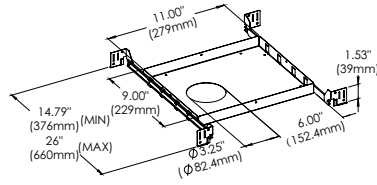


NCP 1-Light Round
41943-014

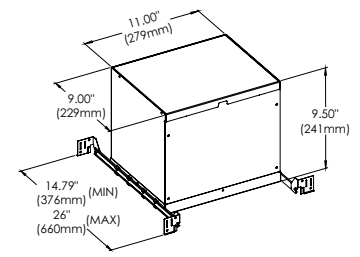


IC 1-Light Round
41944-011
AT 1-Light Round
41945-018




NCP and IC/AT
1-Light Square

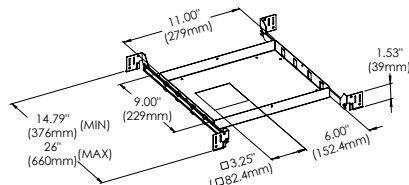


NCP 1-Light Square
41946-015

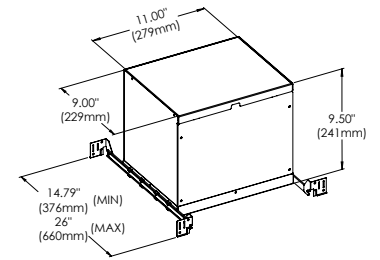


IC 1-Light Square
41947-012
AT 1-Light Square
41948-019

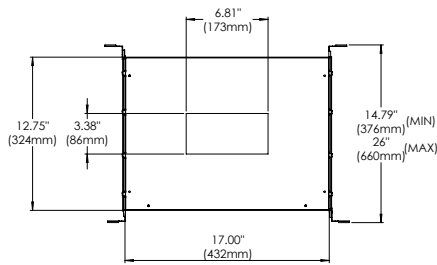


NCP and IC/AT
2-Light Rectangular

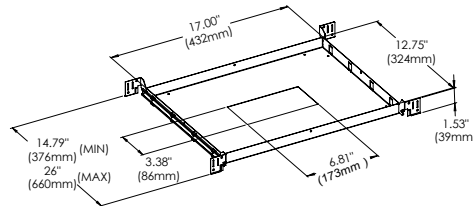


NCP 2-Light Rectangular
41949-016

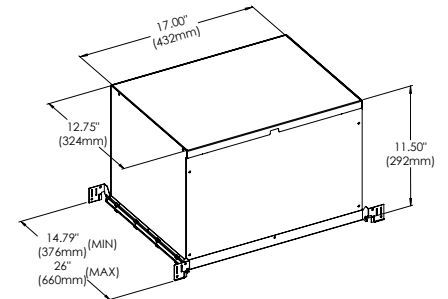


IC 2-Light Rectangular
41950-012
AT 2-Light Rectangular
41951-019

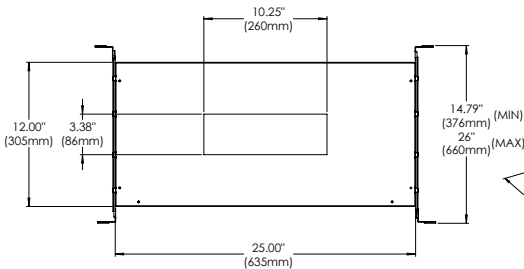

NCP and IC/AT
3-Light Rectangular


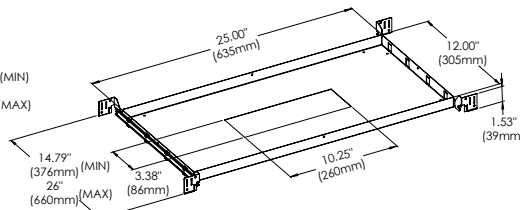


NCP 3-Light Rectangular
41952-016 (trim)
43668-014 (trimless)

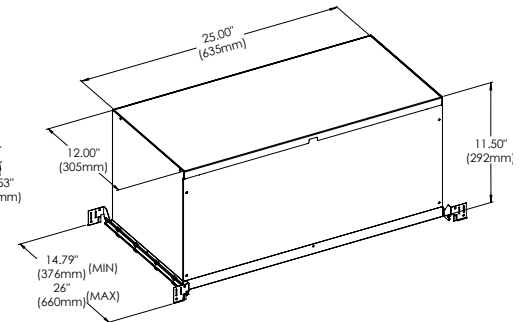

IC 3-Light Rectangular
41953-013 (trim)
43669-011 (trimless)
AT 3-Light Rectangular
41954-010 (trim)
43670-017 (trimless)

INSTALLATION GUIDE

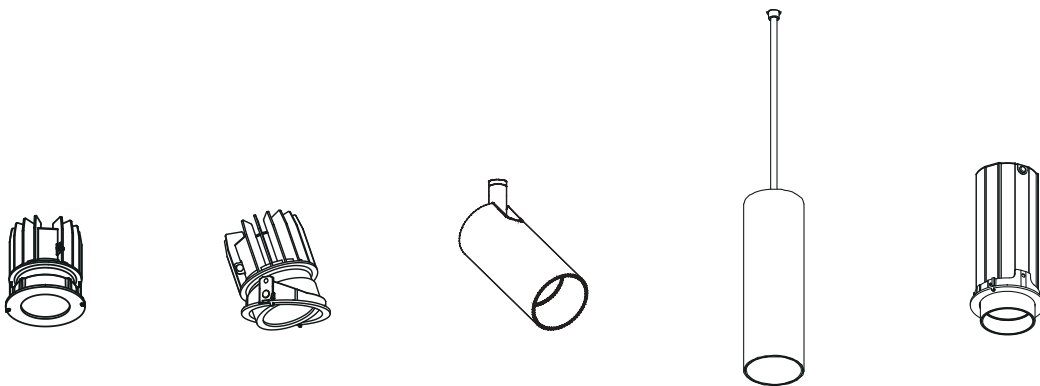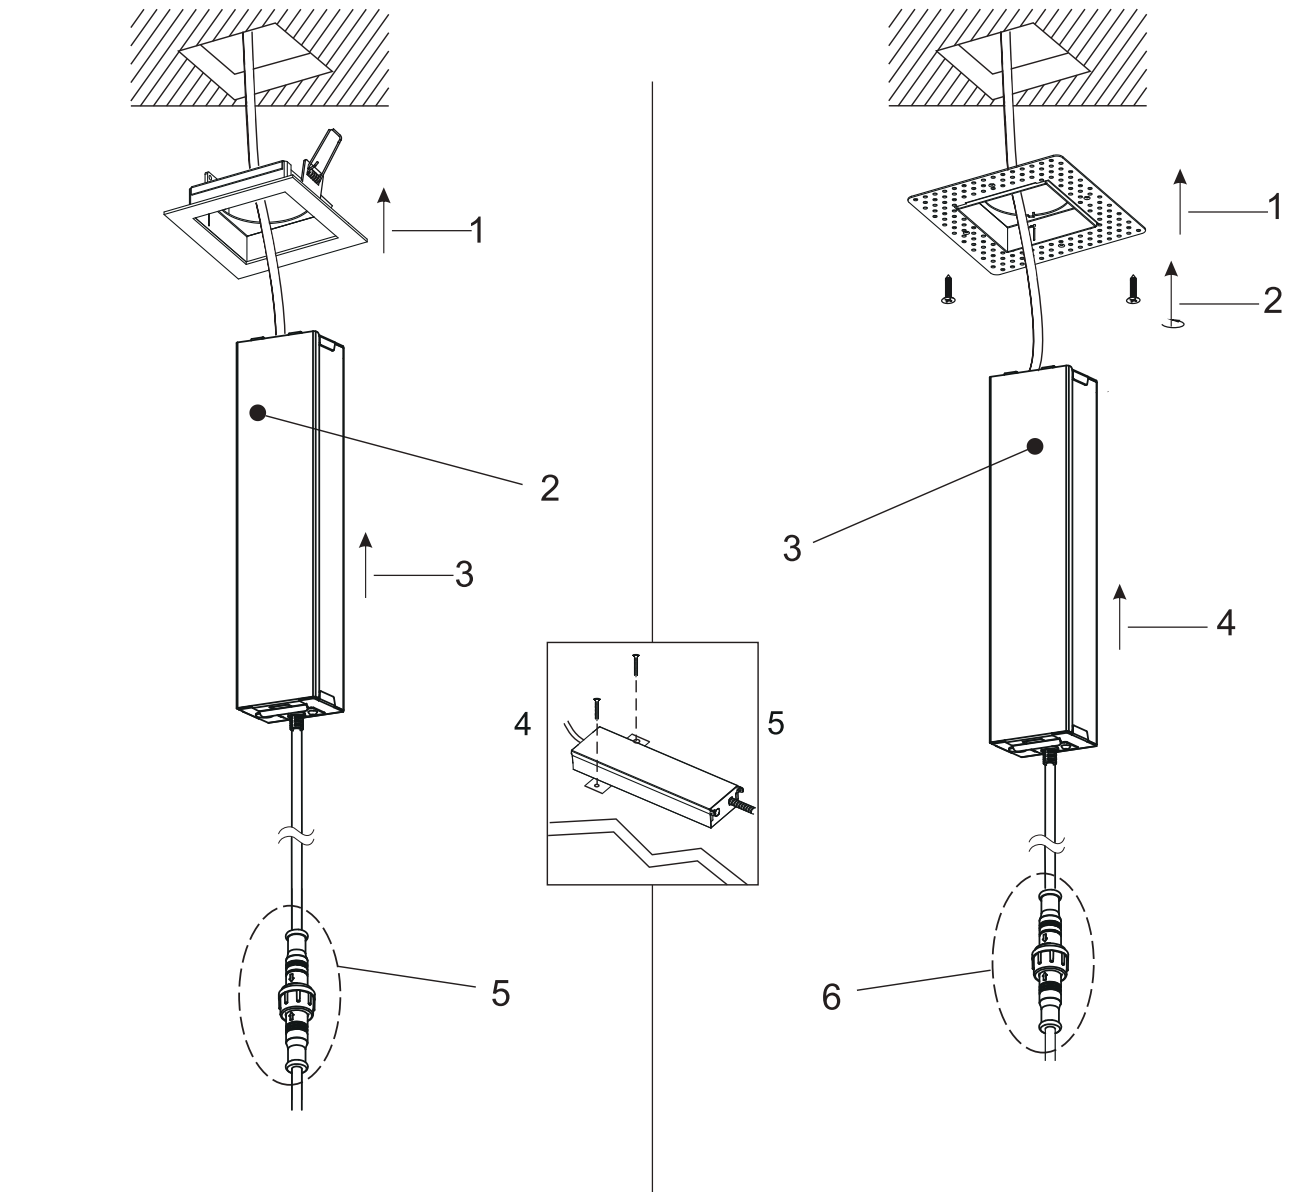




PHOTOMETRICS

A photometric analysis illustrates how light emanates from certain fixtures onto the space surrounding it. With this information, you will be able to determine which modules are necessary or required for the intended purpose.


FIXED




10W 1-LIGHT FIXED NARROW CLEAR

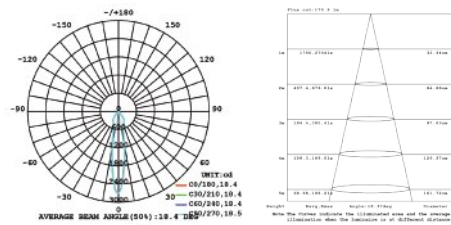


10W 1-LIGHT FIXED MEDIUM CLEAR

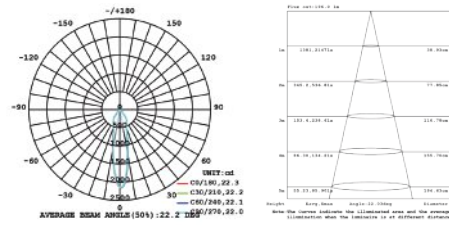


10W 1-LIGHT FIXED WIDE CLEAR

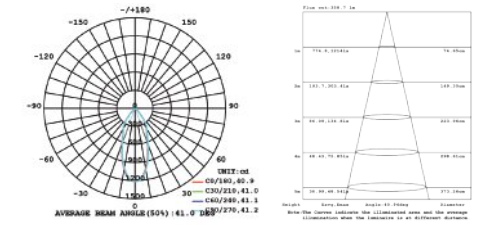


15W 1-LIGHT FIXED NARROW CLEAR

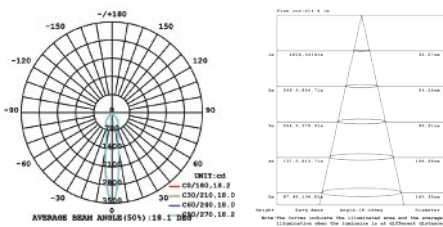

15W 1-LIGHT FIXED MEDIUM CLEAR

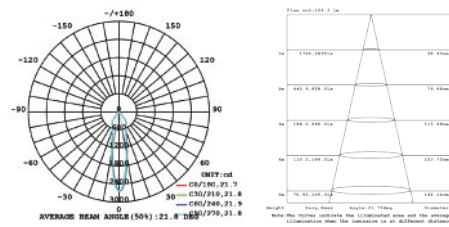


15W 1-LIGHT FIXED WIDE CLEAR

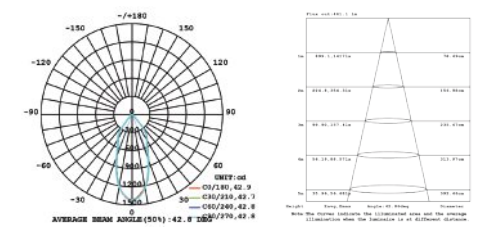


GIMBAL




10W 1-LIGHT GIMBAL NARROW CLEAR

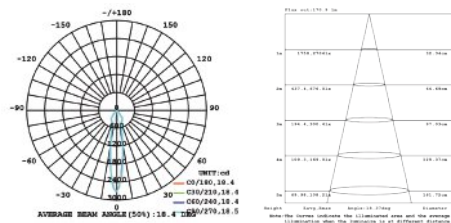


10W 1-LIGHT GIMBAL MEDIUM CLEAR

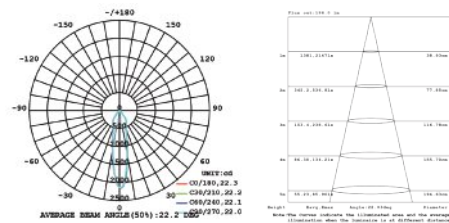


10W 1-LIGHT GIMBAL WIDE CLEAR

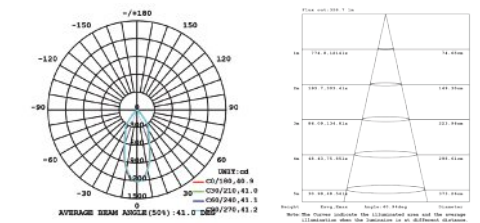


15W 1-LIGHT GIMBAL NARROW CLEAR

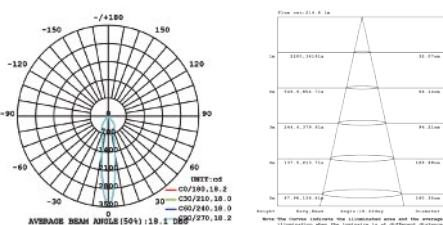


15W 1-LIGHT GIMBAL MEDIUM CLEAR

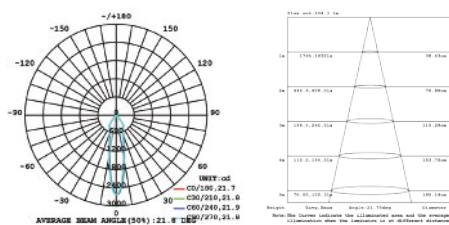


15W 1-LIGHT GIMBAL WIDE CLEAR

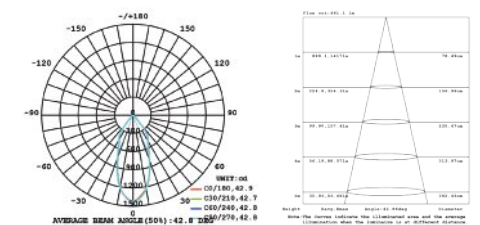


SPOT

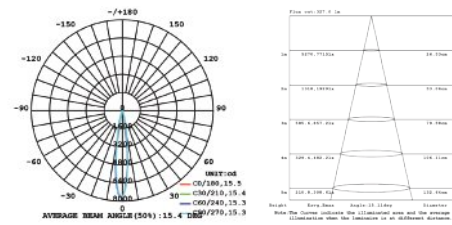

SUSPENSION

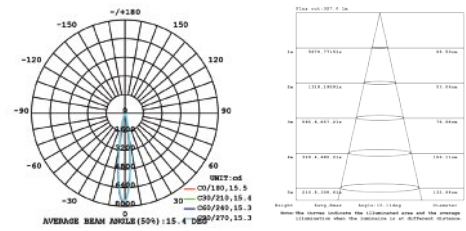

PULL DOWN

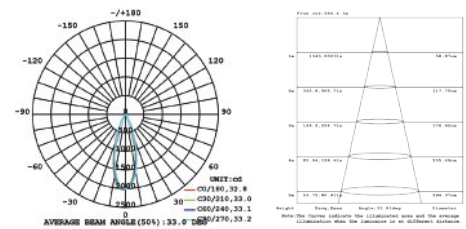



EASY AS 123

Adding or removing accessories can easily be done in 3 simple steps.

Field Adjustable

With an extensive list of customized options, it is our goal to make the application exceptionally uncomplicated. Each light engine is equipped with quick connect attachments for ease of installation. This allows individual modules to be interchanged well after the installation is made. When recessed lighting is already installed, it is harder to maneuver around the product to make even the simplest of changes but this mitigates all that. This handy feature is especially beneficial in the event a module burns out.

Quick Connect

Simply twist the latch to reveal the connector beneath and then separate the cables in 2 easy steps.

IC-Rated Engine

An IC-rated light engine at 10W is now available for even more applications along with 2 CCT light engines to cover a range from 2700K to 4000K.

High Performance LED Chip + Driver

Employs an ESS Series LED Driver with Tri-Mode Dimming and worldwide safety approvals.

UPGRADES THAT SHINE





FULL CONTROL

Start at the very beginning by figuring out how many lights you would like. Choose from a 1-, 2-, or 3-light base then move onto your preferred shape. Options include a round or square form in black or white. From there, you can also decide whether or not to include a trim or leave it trimless for a seamless look and feel.

ORDERING GUIDE

Start at the very beginning by figuring out how many lights you would like. Choose from a 1-, 2-, or 3-light base then move onto your preferred shape. Options include a round or square form with or without trim. From there, you can decide to use either black or white to match your decor.

1 This first step involves 4 easy parts.

Choose:
No. of lights | Shape | Trim or Trimless | Color



2 Decide the type of lighting required

Fixed



Gimbal



Spot




Pull Down



Suspension




3 Design your configuration

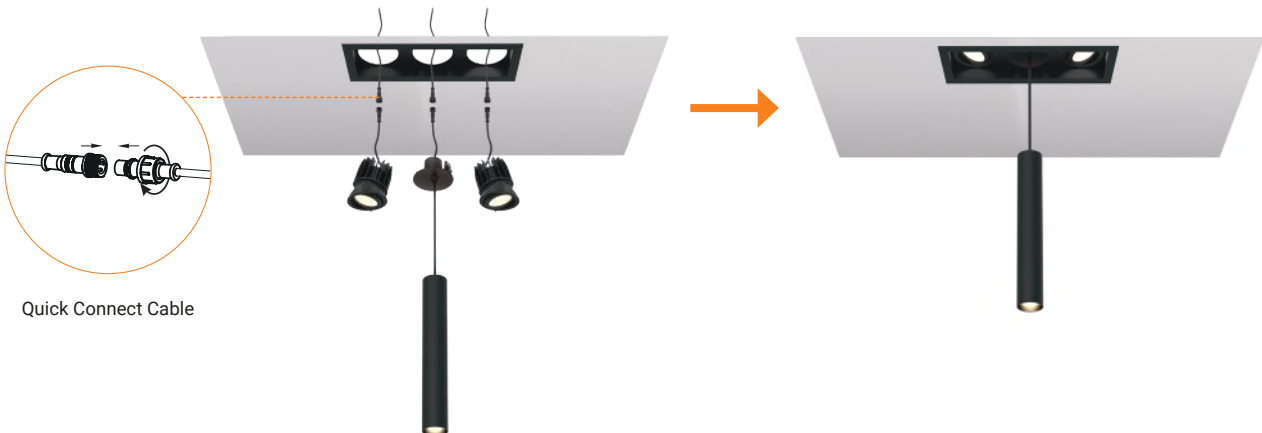

Quick Connect Cable

CONFIGURATOR

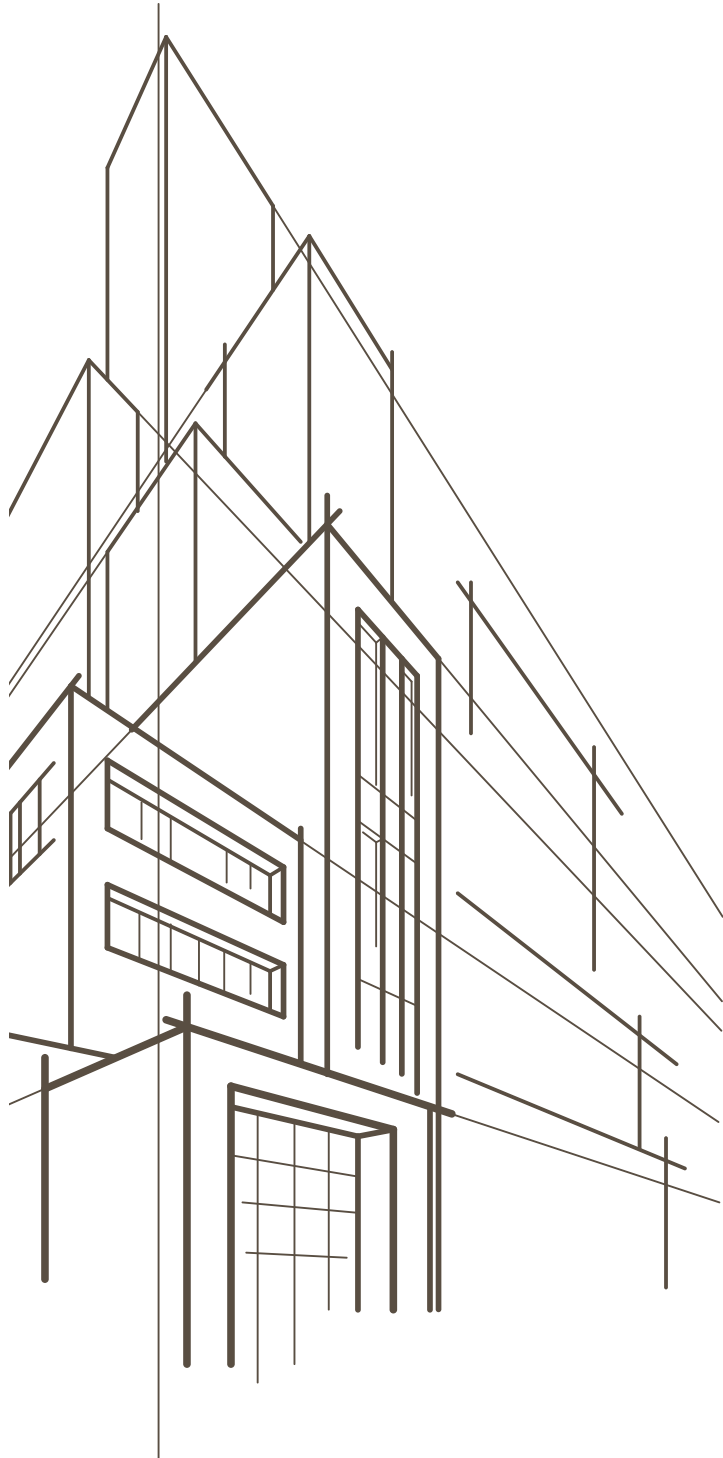

BEGIN BUILDING YOUR 1-LIGHT CONFIGURATION

PART A

If you are designing for a 1-light configuration, continue onto PART C.

CONTINUE CHOOSING YOUR MODULES FOR 2-LIGHT AND 3-LIGHT HOUSINGS

PART B

If you are designing for a 2-light or 3-light configuration, continue to choose your modules accordingly..

COMPLETE YOUR ORDER BY CHOOSING YOUR SPECIFICS

PART C

Finish your order by choosing the wattage, color temperature, beam angle, and the diffuser accessory.

COLLECTION (FAMILY NAME)	NO. OF LIGHTS		TRIM		COLOR		MODULE 01	
TGO	1R	1 LIGHT ROUND	T	TRIMMED	01	BLACK	RG	RECESSED GIMBAL
	1S	1 LIGHT SQUARE	TL	TRIMLESS	02	WHITE	RF	RECESSED FIXED
	2	2 LIGHT					SU	SUSPENSION
	3	3 LIGHT					ST	SPOT
							PD	PULL DOWN

MODULE 02		MODULE 03	
RG	RECESSED GIMBAL	RG	RECESSED GIMBAL
RF	RECESSED FIXED	RF	RECESSED FIXED
SU	SUSPENSION	SU	SUSPENSION
ST	SPOT	ST	SPOT
PD	PULL DOWN	PD	PULL DOWN

WATT		CCT		BEAM ANGLE		DIFFUSER		ADD-ONS	
10	10W IC	27	2700K	N	15° NARROW	CL	CLEAR DIFFUSER	XT	EXTENSION BAFFLE
15	15W NON-IC	30	3000K	M	24° MEDIUM	LN	LINEAR SPREAD DIFFUSER	SN1	SNOOT (BLACK EXT + INT)
		35	3500K	W	38° WIDE	FR	FROSTED DIFFUSER	SN2	SNOOT (WHITE EXT + INT)
		40	4000K			SP	SPREAD DIFFUSER	SN3	SNOOT (WHITE EXT + BLACK INT)
						RE	RED DICHROIC	HC	HONEYCOMB LOUVRE
						GR	GREEN DICHROIC		
						BL	BLUE DICHROIC		
						OR	ORANGE DICHROIC		

Fase¹

33 West Beaver Creek Road,
Richmond Hill, Ontario Canada L4B 1L8

DALLAS TRADE MART
Eurofase Showroom, Suite #4002

tel 905.695.2055
fax 905.695.2056

toll free 1.800.660.5391
toll free 1.800.660.5390



Printed in Canada
© 2021 Eurofase Inc. All rights reserved.

Eurofase Inc. reserves the right to make alterations to the construction and design of products shown in this catalog in order to meet the laws or regulations of any authorized governing organization. The use of products shown in this catalog must comply with local building codes.