

PROJECT: _____


TYPE: _____ DATE: _____

NOTES: _____



FEATURES

The Bravo collection features a sharp sleek design, no matter the type of fixture you choose within this collection. Whether you choose both Bravo surface mount luminaires and Bravo recessed mount fixtures, there will be a harmonious integration throughout the room. Bravo Recessed mount fixtures are available in 3 body sizes and can be outfitted with 7 different modules that can be used for various applications and installations.

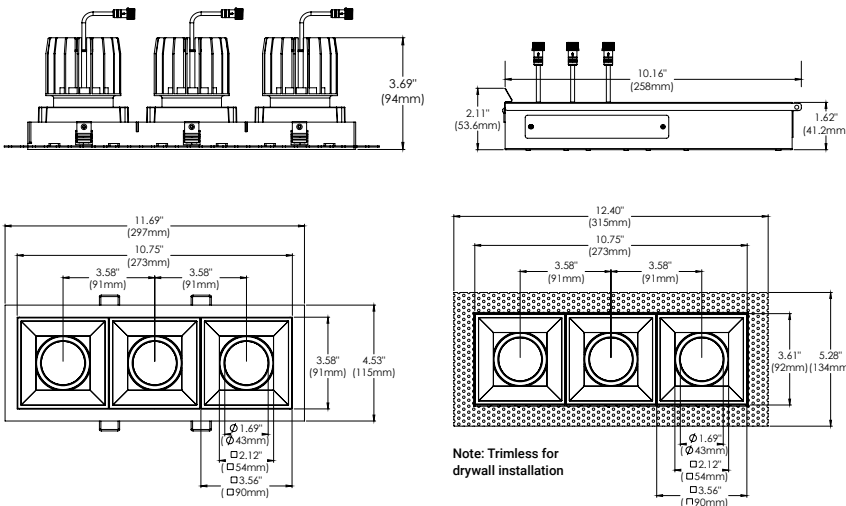

SPECIFICATIONS


FIXTURE BODY	18 gauge powder coated steel body. Aluminum powder coated trim or trimless mesh plate
INSTALLATION TYPE	Remodel/existing ceiling N/C plate, IC Box on page 2
CUT HOLE	Trim: 11 1/4" x 4 1/8" Trimless: 11 1/4" x 4 1/8"
COLOR FINISH	Black/White/Custom
LIGHT MODULE	High output, high efficiency LED COB Lumen Maintenance: 70%@50,000 hrs
INPUT VOLTAGE	120V - 277V
WATTAGE	30W IC Rated, 45W Non-IC Rated
POWER SUPPLY	3 x ERP 10W or 15W, Constant Current 250mA or 350mA power supply Minimum operating temperature: -30° Enclosed in a Junction box with 12" flexible cable to mate to module connector
CRI	90+
DIMMING	TRIAC/ELV/0-10V
LUMENS	3 x 10W, 2520 Lumens & 3 x 15W, 3540 Lumens, Dim to Warm: 3 x 15W, 2355 Lumens
CCT OPTIONS	2700K/3000K/3500K/4000K, DIM (Dim to warm)
REFLECTORS	(N) Narrow 15°/(M) Medium 24°/(W) Wide 38°
DIFFUSERS	(CL) Clear/(LN) Linear Spread/(FR) Frosted (SP) Solite/(RE) Red Dichroic/(GR) Green Dichroic (BL) Blue Dichroic/(OR) Orange Dichroic
APPROVAL	Wet
ELECTRICAL APPROVAL	Compliant
WARRANTY	

SPECIFICATION GUIDE


BRAVO	RECESSED	3-LIGHT	TRIM/ TRIMLESS	FINISH	LIGHT MODULE x 3	WATTAGE	CCT	BEAM ANGLE	DIFFUSER	ADD-ONS							
BVO	R	3	T	TRIM	01	BLACK	RFRFF	RECESSED FIXED	10	10W	27	N	15°	CL	CLEAR	XT	EXTENSION BAFFLE
			TL	TRIMLESS	02	WHITE				15	15W	30	M	24°	LN	LINEAR SPREAD	HC
											35	W	38°	FR	FROSTED	DJ	DOUBLE JUNCTION BOX
											40			SP	SOLITE		
											DTW Dim To Warm			RE	RED DICHROIC		
														GR	GREEN DICHROIC		
														BL	BLUE DICHROIC		
														OR	ORANGE DICHROIC		

ORDERING GUIDE EXAMPLE:
 Bravo / Recessed Mount / 3-Light / Trim / White / Recessed Fixed / Recessed Fixed / Recessed Fixed / 10W / 3000K / 38° / Clear Diffuser
CODE: BVO-R-3-T-02-RFRFF-10-30-W-CL
 For custom module configuration, email sales@eurofase.com


REFLECTOR OPTIONS

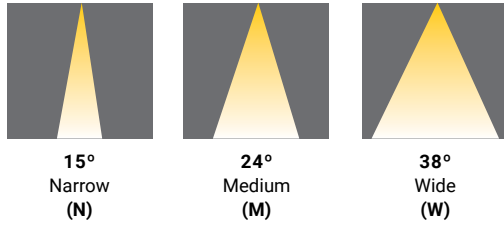

ADD-ONS

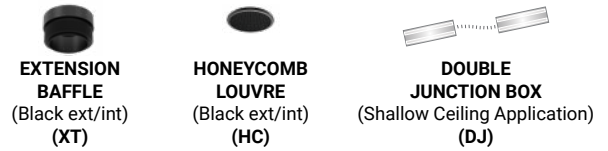

DIFFUSER OPTIONS

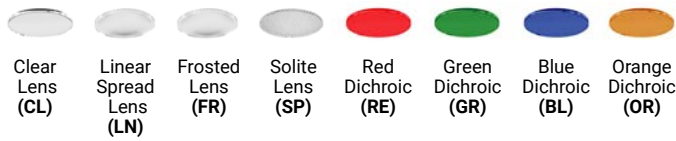


NEW CONSTRUCTION PLATES + IC BOXES




**NEW CONSTRUCTION PLATE
TRIM & TRIMLESS**
44362-010

CUT HOLE:
Trim & Trimless:
11 1/4" x 4 1/8"

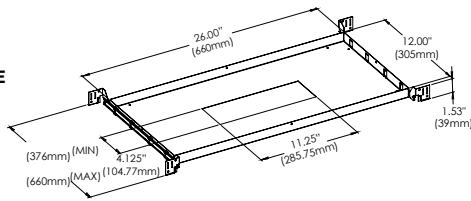


AIRTIGHT IC BOX
44366-018
IC BOX
44365-011


CUT HOLE:
Trim & Trimless:
11 1/4" x 4 1/8"

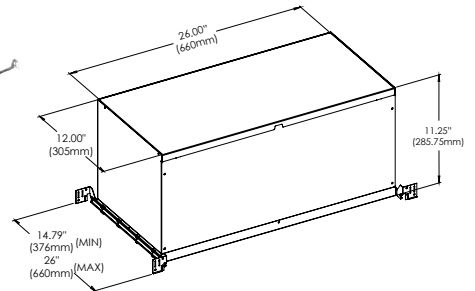


DRIVERS

- Compatible with TRIAC (forward-phase or leading-edge) ELV (reverse-phase or trailing edge) and 0-10V dimmers.
- ESSxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESSxxxW models: ELV dimming only at 230 Vac
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° case hot spot temperature (some models have a higher lifetime)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: Output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac.
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals

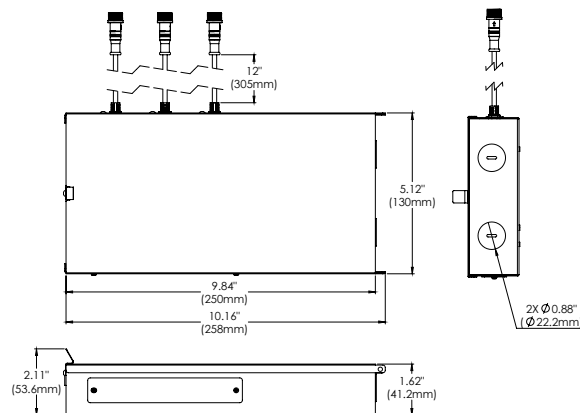


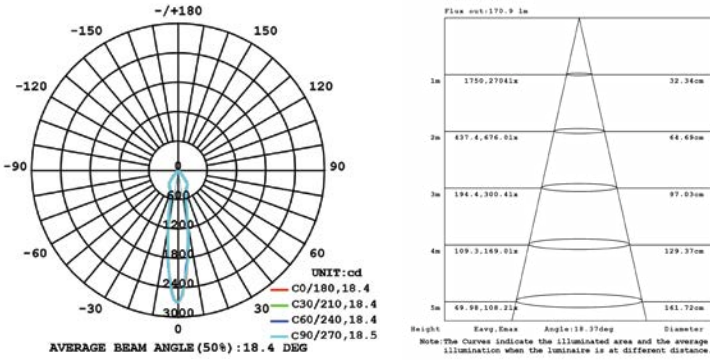


10W 1-LIGHT FIXED NARROW CLEAR

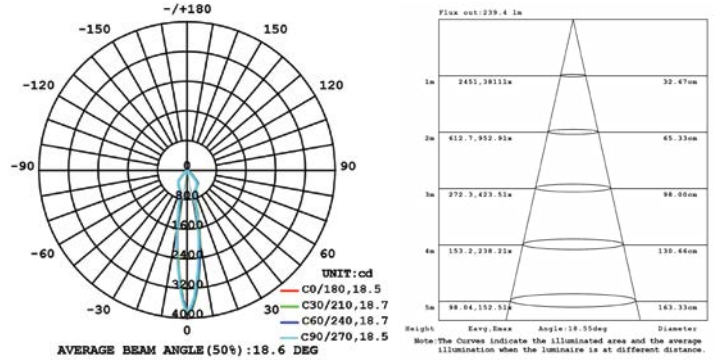


15W 1-LIGHT FIXED NARROW CLEAR

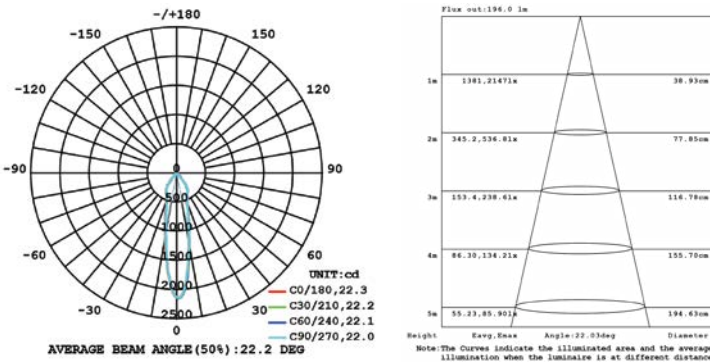


10W 1-LIGHT FIXED MEDIUM CLEAR

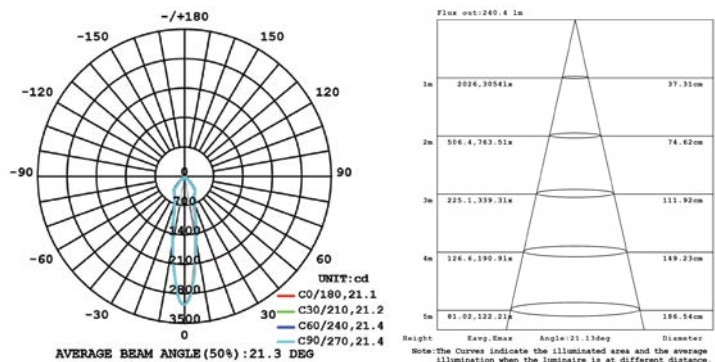

15W 1-LIGHT FIXED MEDIUM CLEAR

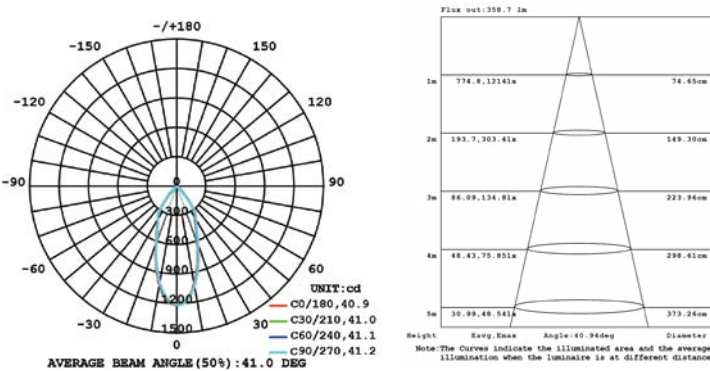

10W 1-LIGHT FIXED WIDE CLEAR

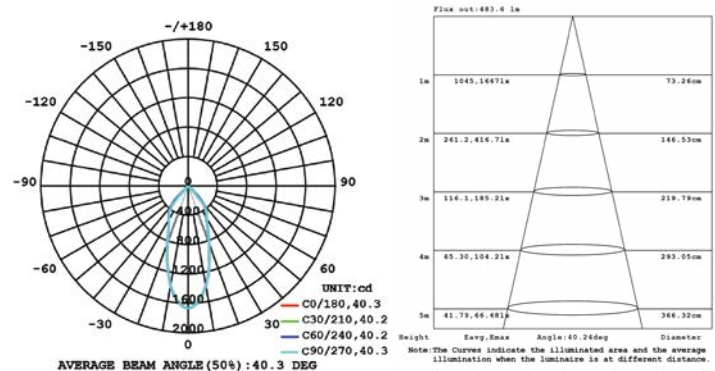

15W 1-LIGHT FIXED WIDE CLEAR