




FEATURES

The Bravo collection features a sharp sleek design, no matter the type of fixture you choose within this collection. Whether you choose both Bravo surface mount luminaries and Bravo recessed mount fixtures, there will be a harmonious integration throughout the room. Bravo surface mount fixtures are available in 3 body sizes and can be outfitted with 6 different modules that can be used for various applications and installations.

SPECIFICATIONS

| | |
|----------------------------|--|
| FIXTURE BODY | 18 gauge powder coated steel body. Aluminum powder coat painted Standard in white or black finish. Other finishes consult factory |
| INSTALLATION TYPE | Mounts over octagon box (not included) |
| COLOR FINISH | Black/White/Custom |
| LIGHT MODULE | High output, high efficiency LED COB Lumen Maintenance: 70%@50,000 hrs |
| INPUT VOLTAGE | 120V - 277V |
| WATTAGE | 15W |
| POWER SUPPLY | ERP 15W, Constant Current 350mA power supply Minimum operating temperature: -30° Enclosed inside housing comes with Quick Connect to light module |
| ADJUSTABILITY | 90° |
| CRI | 90+ |
| DIMMING | TRIAC/ELV/0-10V |
| LUMENS | 15W, 830 Lumens |
| CCT OPTIONS | 3000K/4000K |
| REFLECTORS | (N) Narrow 15° |
| APPROVAL | Damp |
| ELECTRICAL APPROVAL | Compliant |
| WARRANTY | |

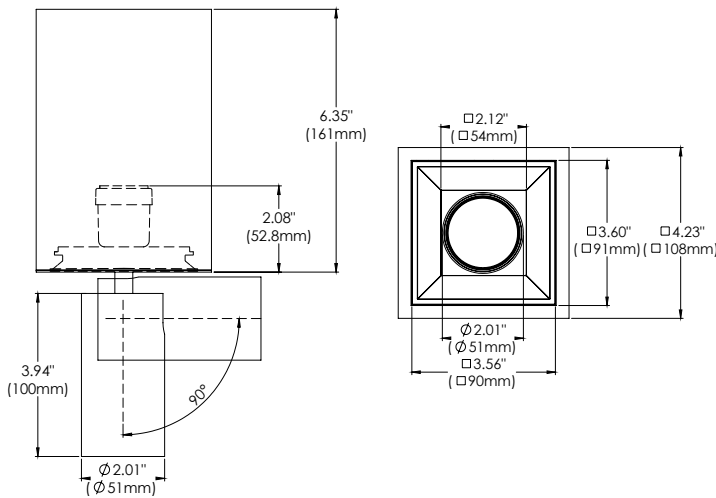

SPECIFICATION GUIDE

| BRAVO | SURFACE MOUNT | 1-LIGHT | FINISH | | LIGHT MODULE x 1 | | WATTAGE | | CCT |
|-------|---------------|---------|--------|-------|------------------|------|---------|-----|-----|
| BVO | S | 1 | 01 | BLACK | ST | SPOT | 15 | 15W | 30 |
| | | | 02 | WHITE | | | | | 40 |

ORDERING GUIDE EXAMPLE:
Bravo / Surface Mount / 1-Light / White / Spot
15W / 3000K / 15°
CODE: BVO-S-1-02-ST-15-30

REFLECTOR OPTIONS




15°
Narrow
(N)

DRIVERS

- Compatible with TRIAC (forward-phase or leading-edge) ELV (reverse-phase or trailing edge) and 0-10V dimmers.
- ESSxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESSxxxW models: ELV dimming only at 230 Vac
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° case hot spot temperature (some models have a higher lifetime)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: Output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac.
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals

LED Driver Enclosed

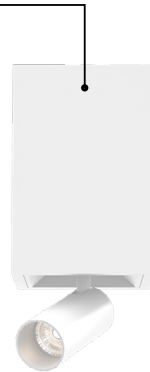

PHOTOMETRICS

