


### FEATURES

The Bravo collection features a sharp sleek design, no matter the type of fixture you choose within this collection. Whether you choose both Bravo surface mount luminaries and Bravo recessed mount fixtures, there will be a harmonious integration throughout the room. Bravo surface mount fixtures are available in 3 body sizes and can be outfitted with 6 different modules that can be used for various applications and installations.

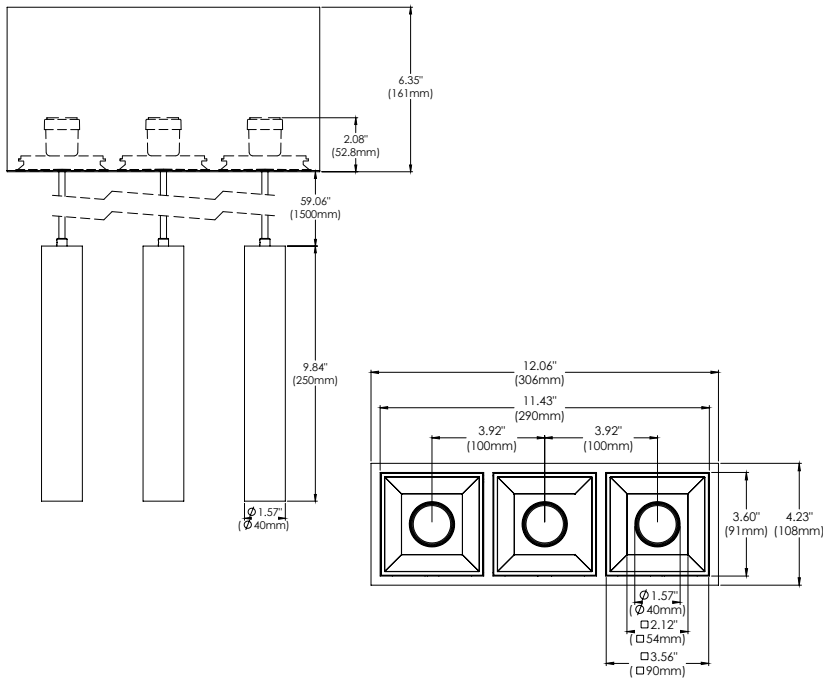

### SPECIFICATIONS

<b>FIXTURE BODY</b>	18 gauge powder coated steel body. Aluminum powder coat painted Standard in white or black finish. Other finishes consult factory
<b>INSTALLATION TYPE</b>	Mounts over octagon box (not included)
<b>COLOR FINISH</b>	Black/White/Custom
<b>LIGHT MODULE</b>	High output, high efficiency LED COB Lumen Maintenance: 70%@50,000 hrs
<b>INPUT VOLTAGE</b>	120V - 277V
<b>WATTAGE</b>	45W
<b>POWER SUPPLY</b>	3 x ERP 15W, Constant Current 350mA power supply Minimum operating temperature: -30° Enclosed inside housing comes with Quick Connect to light module
<b>CRI</b>	90+
<b>DIMMING</b>	TRIAC/ELV/0-10V
<b>LUMENS</b>	2490 Lumens
<b>CCT OPTIONS</b>	3000K/4000K
<b>REFLECTORS</b>	(N) Narrow 15°
<b>DIFFUSERS</b>	(CL) Clear/(LN) Linear Spread/(FR) Frosted (SP) Solite/(RE) Red Dichroic/(GR) Green Dichroic (BL) Blue Dichroic/(OR) Orange Dichroic
<b>APPROVAL</b>	Damp
<b>ELECTRICAL APPROVAL</b>	ETL, 24, JAB, Compliant
<b>WARRANTY</b>	5

### SPECIFICATION GUIDE

BRAVO	SURFACE MOUNT	3-LIGHT	FINISH		LIGHT MODULE x 3		WATTAGE		CCT
BVO	S	3	01	BLACK	SUSUSU	SUSPENSION	15	15W	30
			02	WHITE					40

**ORDERING GUIDE EXAMPLE:**  
Bravo / Surface Mount / 3-Light / White / Suspension / Suspension / Suspension / 15W / 3000K  
**CODE: BVO-S-3-02-SUSUSU-15-30**

### DRIVERS

- Compatible with TRIAC (forward-phase or leading-edge) ELV (reverse-phase or trailing edge) and 0-10V dimmers.
- ESSxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESSxxxW models: ELV dimming only at 230 Vac
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° case hot spot temperature (some models have a higher lifetime)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: Output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac.
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals

### LED Drivers Enclosed One Per Module



### PHOTOMETRICS

