

PROJECT: \_\_\_\_\_



TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



### FEATURES

With their smooth, flat and edgeless design, Oscar family recessed luminaires become a seamless part of ceiling decor. With 3 different light modules suited for ambient and accent lighting, the Oscar family is as highly functional as it is visually appealing. Numerous ordering options allow for further functional and artistic customization. Oscar recessed luminaires are available in larger sizes with higher lumen packages making them ideal for both residential and commercial settings.

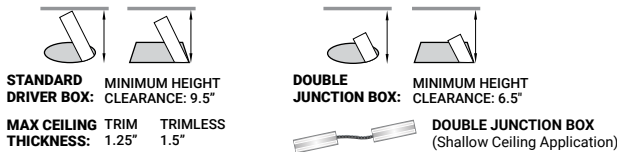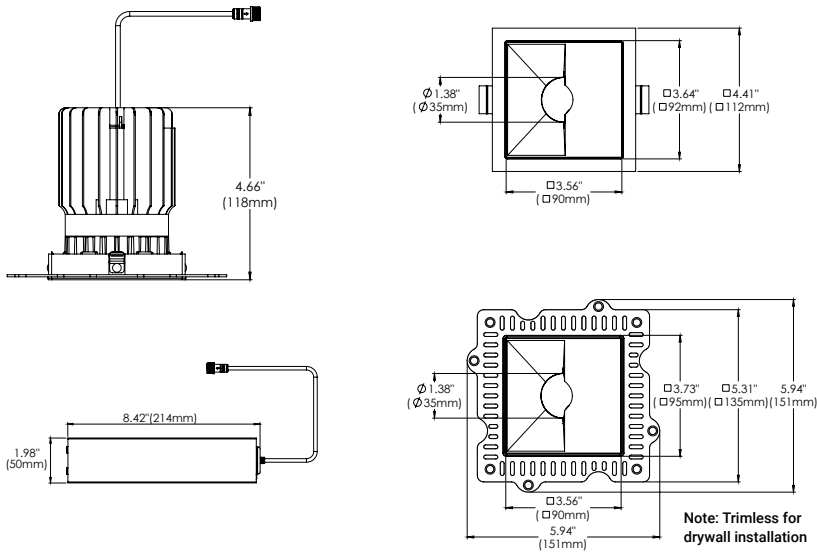

### SPECIFICATION GUIDE


OSCAR	4	SHAPE	TRIM/TRIMLESS	FINISHES	LIGHT MODULE	BAFFLE FINISHES	WATTAGE	CCT	BEAM ANGLE	DIFFUSER	ADD-ONS
OSC	4	S SQUARE	T TRIM	01 BLACK	WL WALL WASH	01 MATTE BLACK	26 26W	27	W 95°	CL CLEAR	DJ DOUBLE JUNCTION BOX
			TL TRIMLESS	02 WHITE		02 MATTE WHITE		30		LN LINEAR SPREAD	
								35		HC HONEYCOMB	
								40		FR FROSTED	
										SP SOLITE	
										RE RED DICHROIC	
										GR GREEN DICHROIC	
										BL BLUE DICHROIC	
										OR ORANGE DICHROIC	

**ORDERING GUIDE EXAMPLE:**  
Oscar / 4 / Square / Trim / White / Wall Wash / Chrome / 15W / 2700K / 95° Beam Angle / Clear Diffuser  
**CODE: OSC-4-S-T-02-WL-04-15-27-W-CL**


### SPECIFICATIONS

<b>FIXTURE BODY</b>	18 gauge powder coated steel body. Aluminum powder coated trim or trimless mesh plate
<b>INSTALLATION TYPE</b>	Remodel/existing ceiling N/C plate, IC Box on page 2
<b>CUT HOLE</b>	Trim: 4" x 4" Trimless: 4" x 4"
<b>COLOR FINISH</b>	Black/White/Custom
<b>LIGHT MODULE</b>	High output, high efficiency LED COB. Lumen Maintenance: 70%@50,000 hrs
<b>INPUT VOLTAGE</b>	120V - 277V
<b>WATTAGE</b>	26W Non-IC Rated
<b>POWER SUPPLY</b>	ERP 26W, Constant Current 700mA power supply Minimum operating temperature: -30° Enclosed in a Junction box with 12" flexible cable to mate to module connector
<b>BEAM ANGLE</b>	95°
<b>CRI</b>	90+
<b>DIMMING</b>	TRIAC/ELV/0-10V
<b>LUMENS</b>	26W, 1200 Lumens
<b>CCT OPTIONS</b>	2700K/3000K/3500K/4000K
<b>REFLECTORS</b>	(W) Wide 95°
<b>DIFFUSERS</b>	(CL) Clear/(LN) Linear Spread/(HC) Honeycomb (FR) Frosted/(SP) Solite/(RE) Red Dichroic/(GR) Green Dichroic/(BL) Blue Dichroic/(OR) Orange Dichroic
<b>APPROVAL</b>	Damp
<b>ELECTRICAL APPROVAL</b>	Compliant
<b>WARRANTY</b>	


#### REFLECTOR OPTIONS

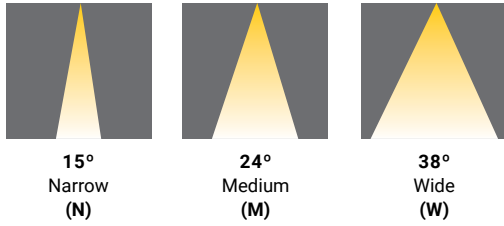


#### BAFFLE FINISHES



#### DIFFUSER OPTIONS

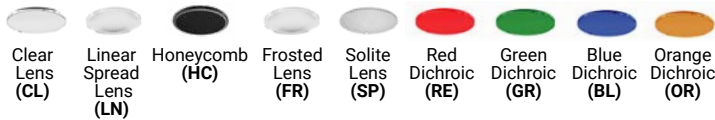

#### ADD-ONS




#### NEW CONSTRUCTION PLATES + IC BOXES




**NEW CONSTRUCTION PLATE  
TRIM/TRIMLESS**  
44838-010

**CUT HOLE:**  
Trim & Trimless: 4" x 4"

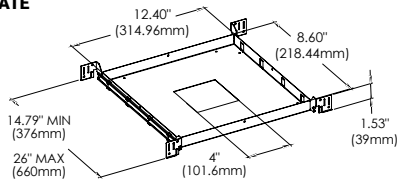


**TRIM  
AT/IC Box: 44839-024  
IC Box: 44839-017**

**CUT HOLE:**  
Trim & Trimless: 4" x 4"

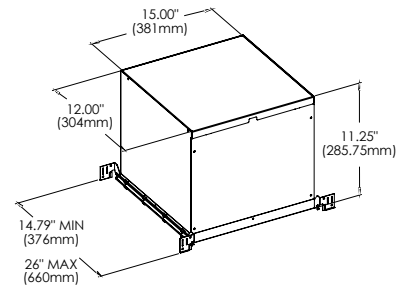



#### DRIVERS

- Compatible with TRIAC (forward-phase or leading-edge) ELV (reverse-phase or trailing edge) and 0-10V dimmers.
- ESSxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESSxxxW models: ELV dimming only at 230 Vac
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° case hot spot temperature (some models have a higher lifetime)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: Output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac.
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals

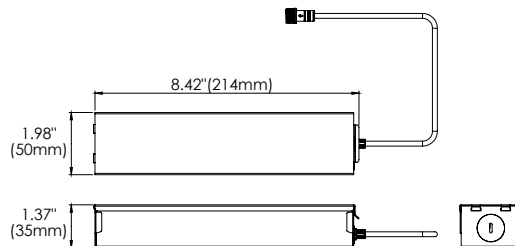

## OSCAR

### OSCAR MEDIUM APERTURE SQUARE WALL WASH PHOTOMETRICS

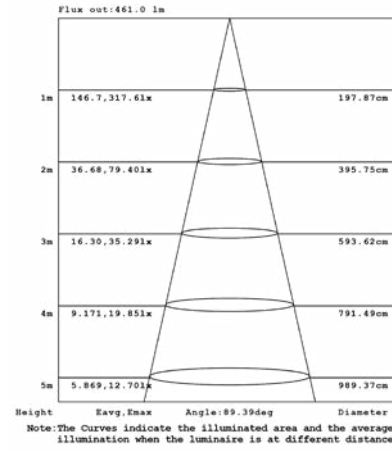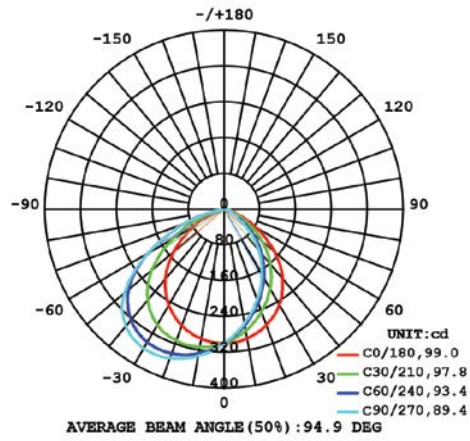

### 26W 1-LIGHT WALL WASH CLEAR