


FEATURES

The Bravo collection features a sharp sleek design, no matter the type of fixture you choose within this collection. Whether you choose both Bravo surface mount luminaires and Bravo recessed mount fixtures, there will be a harmonious integration throughout the room. Bravo Recessed mount fixtures are available in 3 body sizes and can be outfitted with 7 different modules that can be used for various applications and installations.

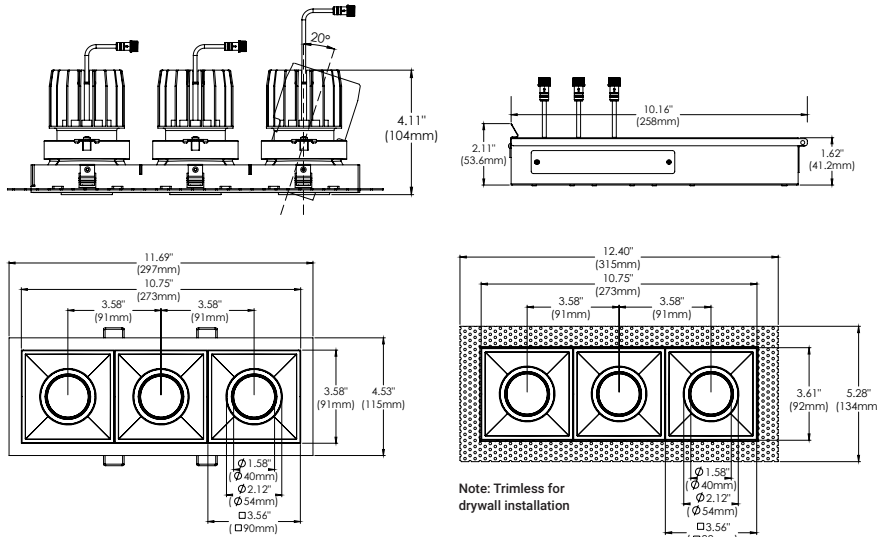

SPECIFICATION GUIDE

BRAVO	RECESSED	3 LIGHT	TRIM/ TRIMLESS	FINISH	LIGHT MODULE x 3		WATTAGE	CCT	BEAM ANGLE	DIFFUSER		ADD-ONS
BVO	R	3	T TRIM	01 BLACK	S666	RECESSED SNOOT GIMBAL	10 10W	27	N 150	CL	CLEAR	XT EXTENSION BAFFLE
			TL TRIMLESS	02 WHITE			15 15W	30	M 240	LN	LINEAR SPREAD	HC HONEYCOMB LOUVRE
								35	W 380	FR	FROSTED	DJ DOUBLE JUNCTION BOX
								40		SP	SOLITE	
								DTW Dim To Warm		RE	RED DICHROIC	
										GR	GREEN DICHROIC	
										BL	BLUE DICHROIC	
										OR	ORANGE DICHROIC	

ORDERING GUIDE EXAMPLE:
 Bravo / Recessed Mount / 3-Light / Trim / White / Recessed Snoot Gimbal / Recessed Snoot Gimbal
 Recessed Snoot Gimbal / 10W / 3000K / 38° / Clear Diffuser
CODE: BVO-R-3-T-02-SGSGG-10-30-W-CL
 For custom module configuration, email sales@eurofase.com

SPECIFICATIONS

FIXTURE BODY	18 gauge powder coated steel body. Aluminum powder coated trim or trimless mesh plate
INSTALLATION TYPE	Remodel/existing ceiling N/C plate, IC Box on page 2
CUT HOLE	Trim: 11 1/4" x 4 1/8" Trimless: 11 1/4" x 4 1/8"
COLOR FINISH	Black/White/Custom
LIGHT MODULE	High output, high efficiency LED COB Lumen Maintenance: 70%@50,000 hrs
INPUT VOLTAGE	120V - 277V
WATTAGE	30W IC Rated, 45W Non-IC Rated
POWER SUPPLY	3 x ERP 10W or 15W, Constant Current 250mA or 350mA power supply Minimum operating temperature: -30° Enclosed in a Junction box with 12" flexible cable to mate to module connector
ADJUSTABILITY	20°
CRI	90+
DIMMING	TRIAC/ELV/0-10V
LUMENS	3 x 10W, 1050 Lumens & 3 x 15W, 1560 Lumens, Dim to Warm: 3 x 15W, 1155 Lumens
CCT OPTIONS	2700K/3000K/3500K/4000K, DIM (Dim to warm)
REFLECTORS	(N) Narrow 15°/(M) Medium 24°/(W) Wide 38°
DIFFUSERS	(CL) Clear/(LN) Linear Spread/(FR) Frosted (SP) Solite/(RE) Red Dichroic/(GR) Green Dichroic (BL) Blue Dichroic/(OR) Orange Dichroic
APPROVAL	Damp
ELECTRICAL APPROVAL	Compliant
WARRANTY	