


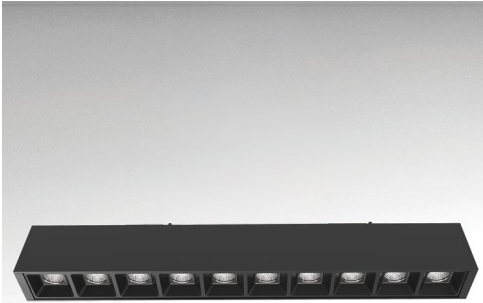

FEATURES

Linear module cluster fixtures offer uniform light distribution, high output performance and stylish design. This fixture family is available in 3 sizes and sits flush to the channel lip and ceiling line.

SPECIFICATIONS

Light Source:	1 x 22 W Integrated LED
Beam Angle:	25°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	1925 Lm
Delivered Lumens:	1378 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	10.87"L x 1.30"W x 2.16"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
35758-01




White
35758-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
25°		
1.0	0.61	5243
2.0	1.23	1311
3.0	1.84	582
4.0	2.46	327
5.0	3.08	209




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

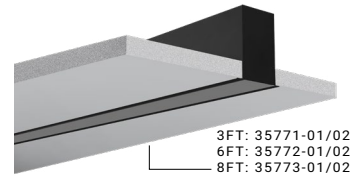

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

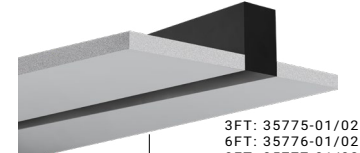

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Linear module cluster fixtures offer uniform light distribution, high output performance and stylish design. This fixture family is available in 3 sizes and sits flush to the channel lip and ceiling line.

SPECIFICATIONS

Light Source:	1 x 33 W Integrated LED
Beam Angle:	25°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	2888 Lm
Delivered Lumens:	2057 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	15.95"L x 1.30"W x 2.16"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
35759-01




White
35759-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
25°		
1.0	0.37	1755
2.0	0.75	438
3.0	1.12	194
4.0	1.49	109
5.0	1.86	70



1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

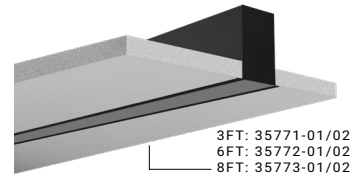

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED



3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Spot fixtures are a popular choice for controlled, focused accent lighting. Low and high wattage fixtures are available with 3550 rotation and a 900 vertical adjustment. Spot fixtures are solid in construction and have versatile attributes. Construct Spots are a common choice for a range of projects.

SPECIFICATIONS

Light Source:	1 x 6.4 W Integrated LED
Beam Angle:	20°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	604 Lm
Delivered Lumens:	335 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Vertical Rotation:	90°
Horizontal Rotation:	355°
Dimension:	1.57"DIA x 1.30"W x 6.14"H
Approval:	Indoor use

Electrical Approval:  COMPLIANT

Warranty: 

ORDERING OPTIONS




Black
35763-01




White
35763-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
20°		
1.0	0.34	1834
2.0	0.68	458
3.0	1.02	203
4.0	1.37	114
5.0	1.71	73



1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

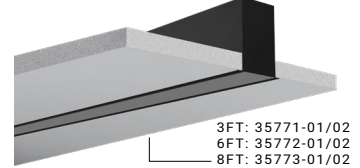


3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

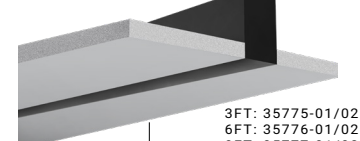

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Spot fixtures are a popular choice for controlled, focused accent lighting. Low and high wattage fixtures are available with 3550 rotation and a 900 vertical adjustment. Spot fixtures are solid in construction and have versatile attributes. Construct Spots are a common choice for a range of projects.

SPECIFICATIONS

Light Source:	1 x 13.5 W Integrated LED
Beam Angle:	20°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	1207 Lm
Delivered Lumens:	659 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Vertical Rotation:	90°
Horizontal Rotation:	355°
Dimension:	2.52"DIA x 1.30"W x 6.14"H
Approval:	Indoor use

Electrical Approval:    COMPLIANT

Warranty: 

ORDERING OPTIONS




Black
35764-01



White
35764-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
20°		
1.0	0.25	3342
2.0	0.50	835
3.0	0.75	371
4.0	1.00	208
5.0	1.25	133


1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT




PENDANT



TRIM RECESSED



TRIMLESS RECESSED



3FT: 35767-01/02
6FT: 35768-01/02
8FT: 35769-01/02

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Dual Lens fixtures are one piece but come with two light modules. These fixtures fit flush to the channel and ceiling line. They are outfitted with an opal Lens to reduce glare and maximize light control.

SPECIFICATIONS

Light Source:	1 x 4.5 W Integrated LED
Beam Angle:	80°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	362 Lm
Delivered Lumens:	180 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	4.13"L x 1.30"W x 2.24"H
Approval:	Indoor use
Electrical Approval:	COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
35765-01



White
35765-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
80°		
1.0	1.19	57
2.0	2.39	14
3.0	3.59	6
4.0	4.79	3
5.0	5.99	2

1 m=3.28 ft
1 lx=0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

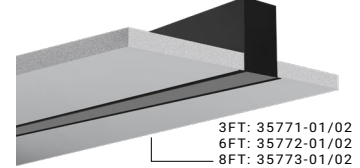

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

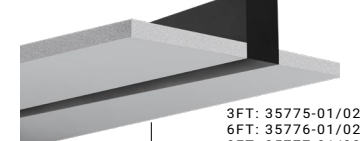

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Slim and sleek mini cylinder pendants are the perfect choice of light when decorative task lighting is desired. With many applicable uses such as a cluster pendant over a kitchen island or an office work surface, the Construct Suspended fixtures add dimension and style to your space.

SPECIFICATIONS

Light Source:	1 x 6.4W Integrated LED
Beam Angle:	20°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	604 Lm
Delivered Lumens:	372 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	1.57"DIA x 3.94"W x 9.84"H
Adjustable Wire Length:	60"
Approval:	Indoor use

Electrical Approval:




COMPLIANT

Warranty:




DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
20°		
1.0	0.37	1755
2.0	0.75	438
3.0	1.12	194
4.0	1.49	109
5.0	1.86	70




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

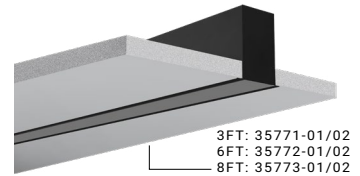

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

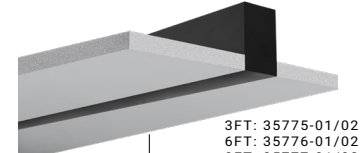

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

ORDERING OPTIONS



Black
35766-01



White
35766-02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Lens fixtures are the perfect choice for consistent lighting that spans a large area. These fixtures sit flush to the channel lip and comes with an opal lens to diffuse the light. Available in 3 sizes. Lens fixtures can be joined together seamlessly using the overlap lens found in the accessories section.

SPECIFICATIONS

Light Source:	1 x 10 W Integrated LED
Beam Angle:	115°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	772 Lm
Delivered Lumens:	472 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	11.90"L x 1.30"W x 2.17"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36372-01




White
36372-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(1x)
115°		
1.0	3.05	106
2.0	6.10	26
3.0	9.15	11
4.0	12.20	6
5.0	15.26	4




1 m=3.28 ft
1 lx=0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT




PENDANT



TRIM RECESSED

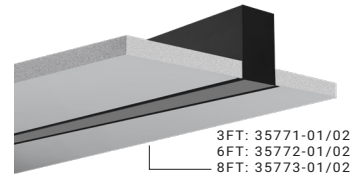

TRIMLESS RECESSED

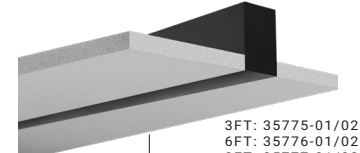


COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming

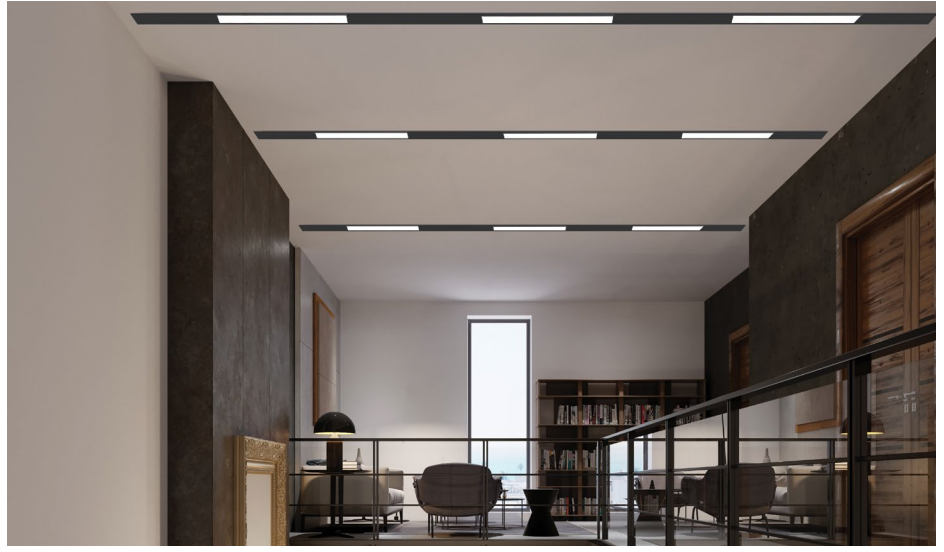

FEATURES

Lens fixtures are the perfect choice for consistent lighting that spans a large area. These fixtures sit flush to the channel lip and comes with an opal lens to diffuse the light. Available in 3 sizes. Lens fixtures can be joined together seamlessly using the overlap lens found in the accessories section.

SPECIFICATIONS

Light Source:	1 x 19 W Integrated LED
Beam Angle:	115°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	1824 Lm
Delivered Lumens:	1197 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	23.74"L x 1.30"W x 2.17"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36373-01




White
36373-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
115°		
1.0	3.16	209
2.0	6.32	52
3.0	9.48	23
4.0	12.64	13
5.0	15.80	8




1 m=3.28 ft
1 lx=0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

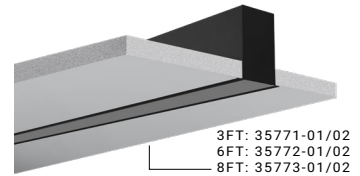

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

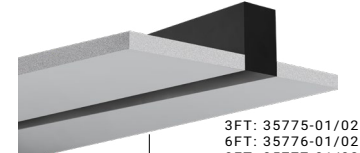

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Lens fixtures are the perfect choice for consistent lighting that spans a large area. These fixtures sit flush to the channel lip and comes with an opal lens to diffuse the light. Available in 3 sizes. Lens fixtures can be joined together seamlessly using the overlap lens found in the accessories section.

SPECIFICATIONS

Light Source:	1 x 27.5 W Integrated LED
Beam Angle:	115°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	2286 Lm
Delivered Lumens:	1428 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	35.55"L x 1.30"W x 2.17"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36374-01




White
36374-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
115°		
1.0	3.05	342
2.0	6.10	85
3.0	9.16	38
4.0	12.21	21
5.0	15.27	13




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

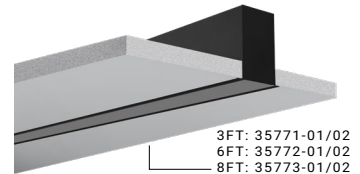

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

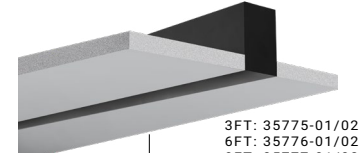

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Wall Wash fixtures are used for accent lighting when certain wall decor requires light optimization. They sit flush to the channel and ceiling line and quietly blend into the existing ceiling structure.

SPECIFICATIONS

Light Source:	1 x 11W Integrated LED
Beam Angle:	70° (Wall Wash)
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	975 Lm
Delivered Lumens:	462 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	5.62"L x 1.30"W x 2.52"H
Approval:	Indoor use
Electrical Approval:	 COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36376-01




White
36376-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(1x)
70°		
1.0	1.45	256
2.0	2.90	64
3.0	4.35	28
4.0	5.80	16
5.0	7.25	10




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT




PENDANT



TRIM RECESSED

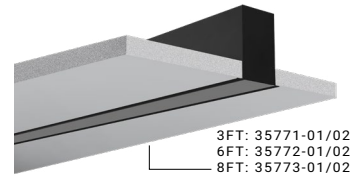

TRIMLESS RECESSED

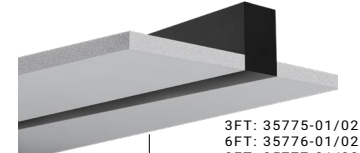

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Dual Baffle fixtures are also one piece but come with two light fixtures. These fixtures fit flush to the channel and ceiling line. They feature a clear lens for maximum light output and an inner ridge baffle for glare reduction and aesthetic appeal.

SPECIFICATIONS

Light Source:	1 x 4.5 W Integrated LED
Beam Angle:	35°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	398 Lm
Delivered Lumens:	301 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	4.13"L x 1.30"W x 2.24"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36377-01




White
36377-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
35°		
1.0	0.62	753
2.0	1.25	188
3.0	1.88	83
4.0	2.51	47
5.0	3.14	30




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

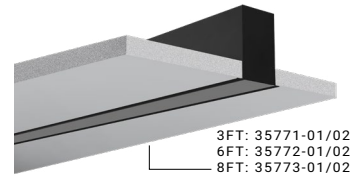

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

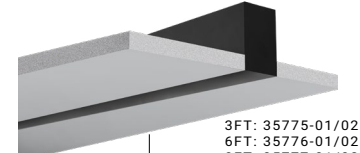

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming



FEATURES

Adjustable Multiple Spots are cluster fixtures that are built on an adjustable frame. They are used in applications where uniform controlled light needs to be directed to a particular area, either as task or accent lighting.

SPECIFICATIONS

Light Source:	1 x 11 W Integrated LED
Beam Angle:	30°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	962 Lm
Delivered Lumens:	686 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Vertical Rotation:	90°
Dimension:	5.67" L x 1.30" W x 4" H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36379-01




White
36379-02

DIAGRAM

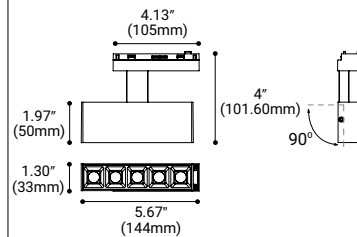

PHOTOMETRICS

H(m)	D(m)	E(lx)
30°		
1.0	0.62	1854
2.0	1.24	463
3.0	1.86	206
4.0	2.48	115
5.0	3.10	74




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

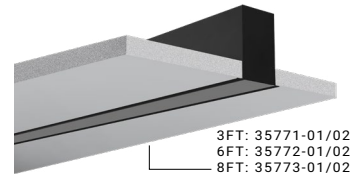

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

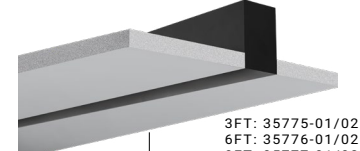

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02


COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming

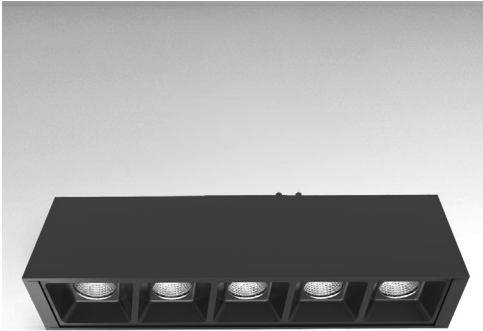

FEATURES

Linear module cluster fixtures offer uniform light distribution, high output performance and stylish design. This fixture family is available in 3 sizes and sits flush to the channel lip and ceiling line.

SPECIFICATIONS

Light Source:	1 x 11 W Integrated LED
Beam Angle:	25°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	962 Lm
Delivered Lumens:	686 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	5.67" L x 1.30" W x 2.16" H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
35757-01




White
35757-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
25°		
1.0	0.62	1854
2.0	1.24	463
3.0	1.86	206
4.0	2.48	115
5.0	3.10	74




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT




PENDANT



TRIM RECESSED

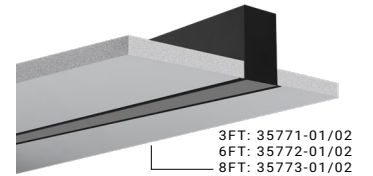

TRIMLESS RECESSED

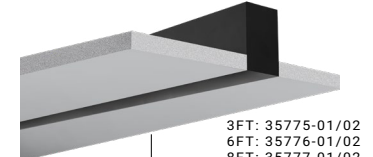

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming